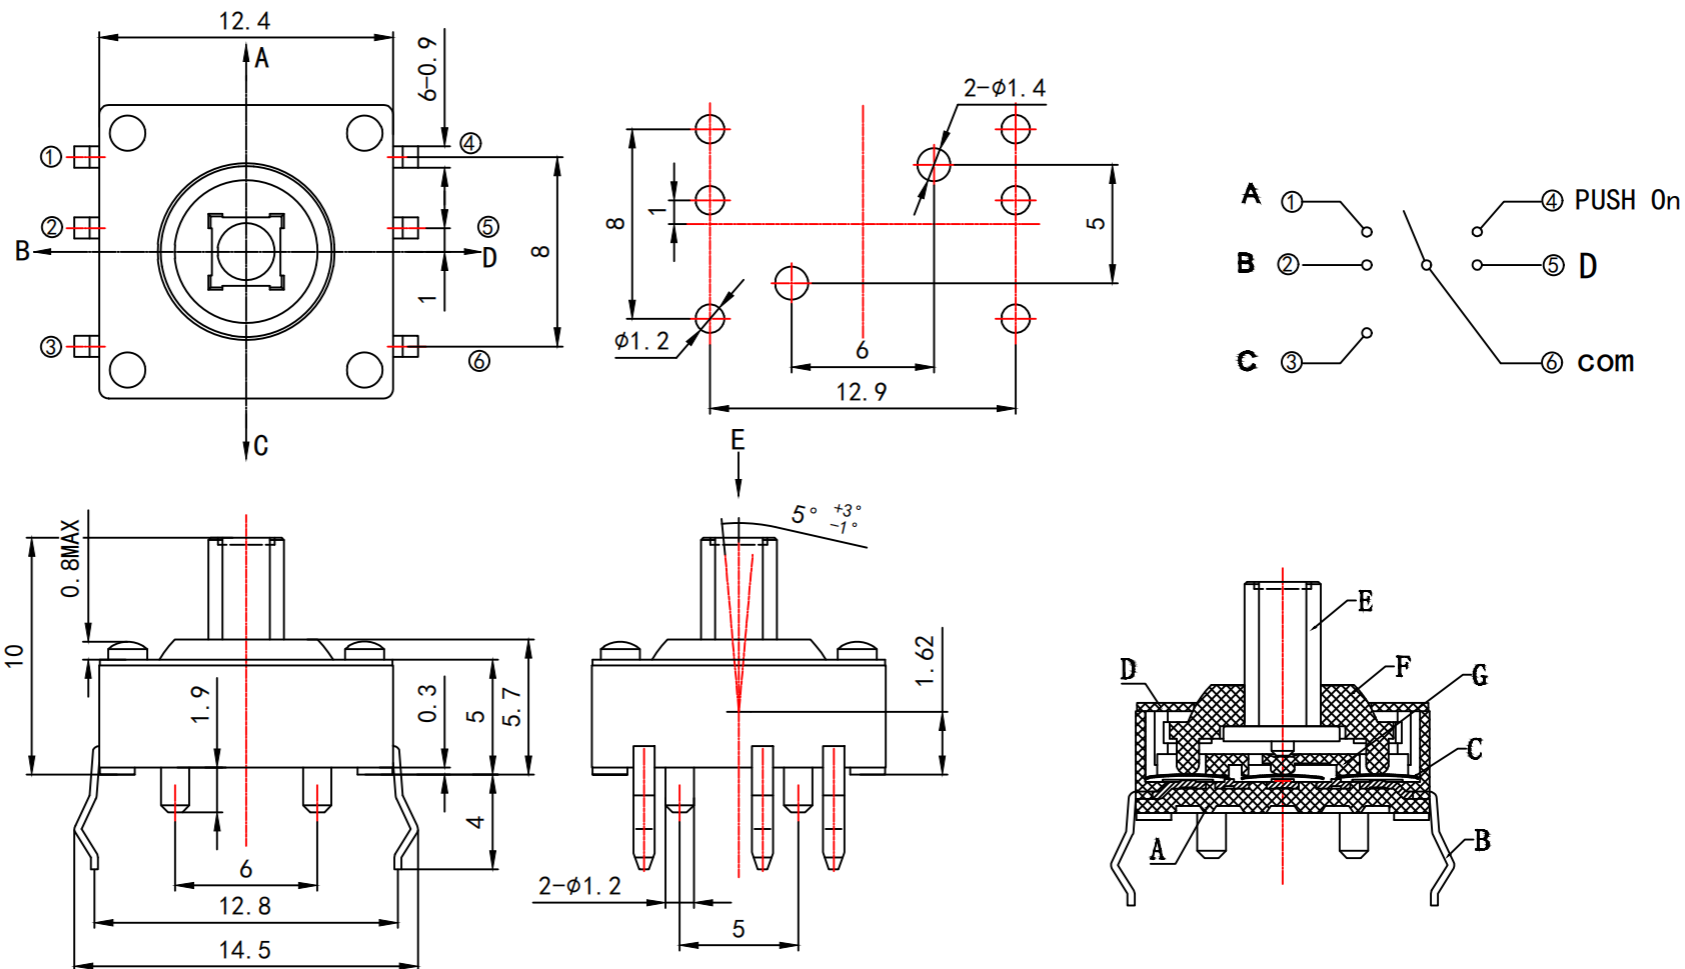




RoHS2.0  
Compliant



Technical requirements

1. Rated Current: 0.1A MAX
2. Rated voltage: DC 12V
3. Contact resistance:  $\leq 100\text{m}\Omega$
4. Insulation Resistance:  $\geq 100\text{M}\Omega$
5. Compressive strength: AC250V 50Hz/1 min
6. Operating force:  $4-250 \pm 50\text{gf}$   $250\text{gf} \pm 70\text{gf}$
7. Mechanical life: 50,000 cycles Min
8. Temperature Range:  $-30^\circ\text{C} \sim +85^\circ\text{C}$

TOLERANCE	X. XXX	$\pm 0.05$		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd			
	X. XX	$\pm 0.15$		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a>			
X. X	$\pm 0.20$		phone: 15812872448				
X.	$\pm 0.30$		TITLE: 多功能五向开关				
ANGLE	$\pm 5.0^\circ$		PART NO: 成品图				
PROTECTON		DRAWN:		DATE:	18-10-08	UNIT:	mm
		CHECKED:		DATE:	18-10-08	SCALE:	FULL
		APPROVED:		DATE:	18-10-08	SIZE:	A4