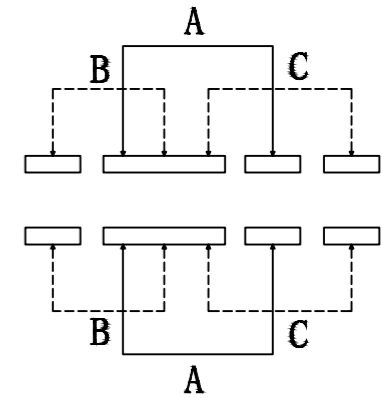
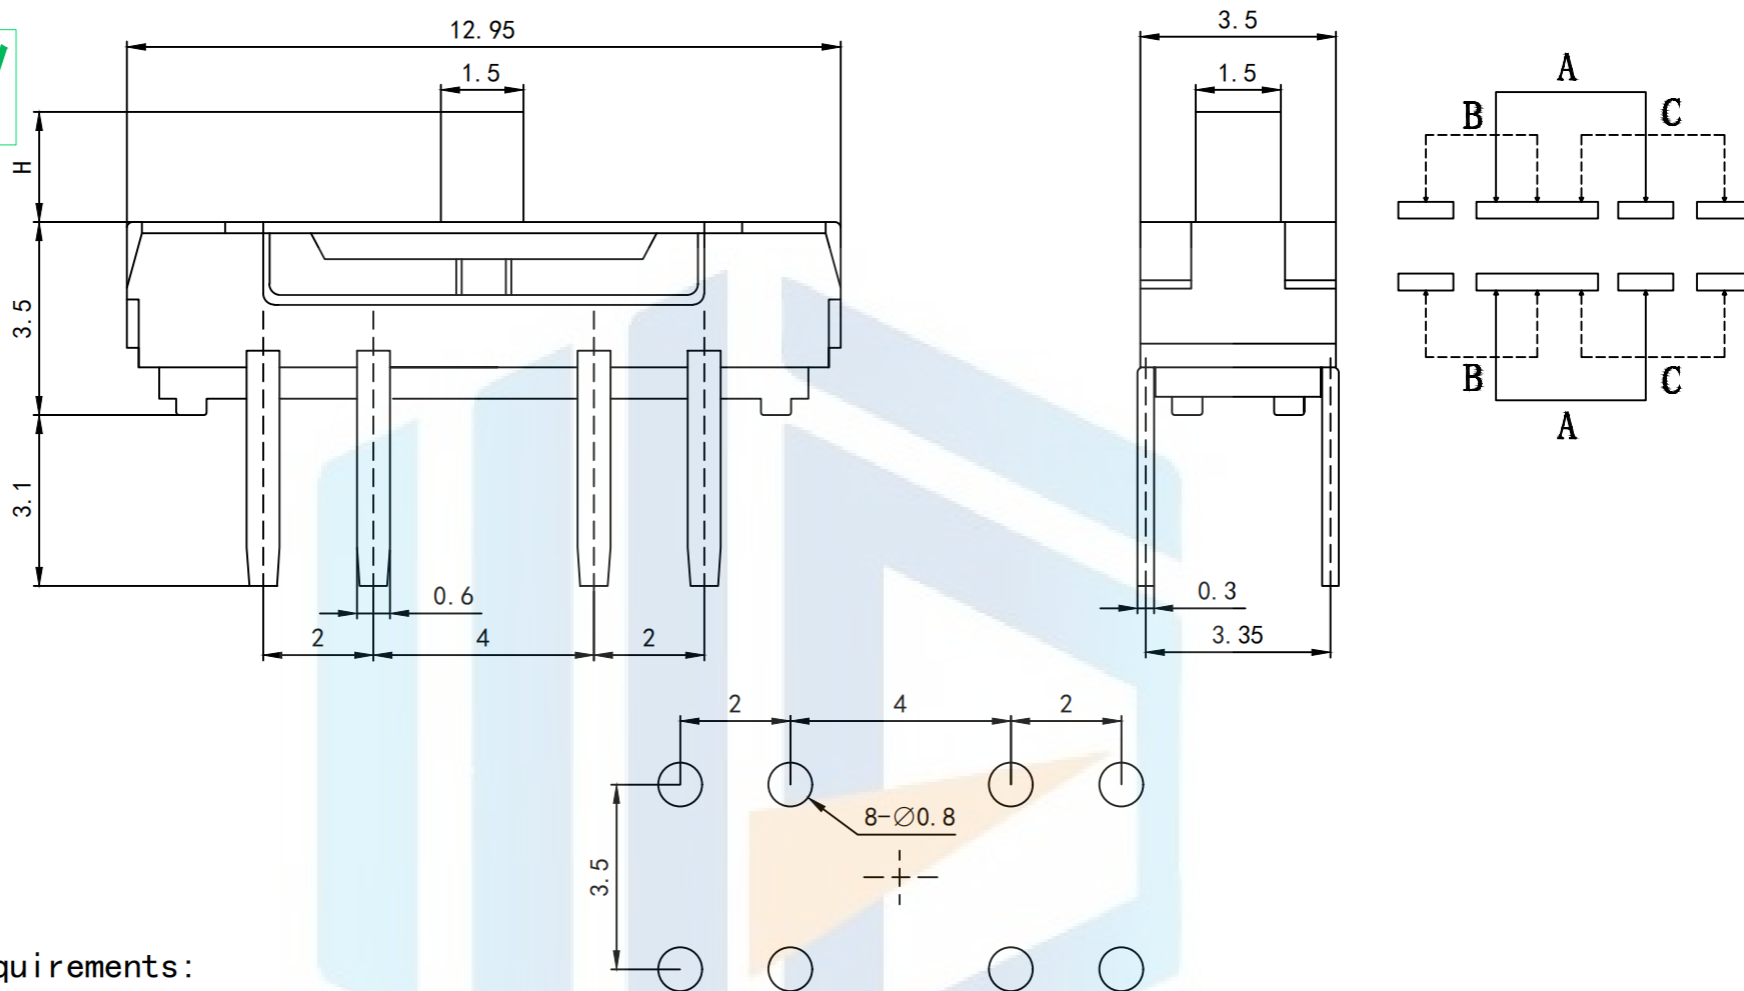




RoHS2.0
Compliant ✓



Technical requirements:
 Rated electrical load: DC12V 0.1A
 Insulation Resistance: $\geq 100M\Omega$
 Compressive Strength: AC250V (50Hz) 1min
 Ambient Temperature: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
 Relative humidity: (40°C) $\leq 95\%$
 Contact Resistance: $\leq 50M\Omega$
 Actuation: $200\text{gf} \pm 30\text{gf}$
 Temperature Resistance: 250°
 Life span: 10000 times

TOLERANCE X. XXX ± 0.05 X. XX ± 0.15 X. X ± 0.20 X. ± 0.30 ANGLE $\pm 5.0^{\circ}$		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd		
		https://www.hq-dz.com phone: 15812872448		
PROTECTON 	TITLE: 迷你拨动开关		PART NO: MSS-23D18	
	DRAWN:		DRAWING NO: 13*3.5*3.5*H	
	CHECKED:	DATE: 18-10-08	UNIT: mm	SCALE: FULL
APPROVED:	DATE: 18-10-08	DATE: 18-10-08	SIZE: A4	