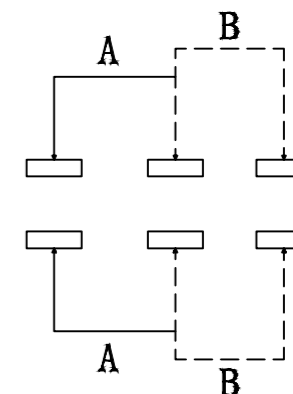
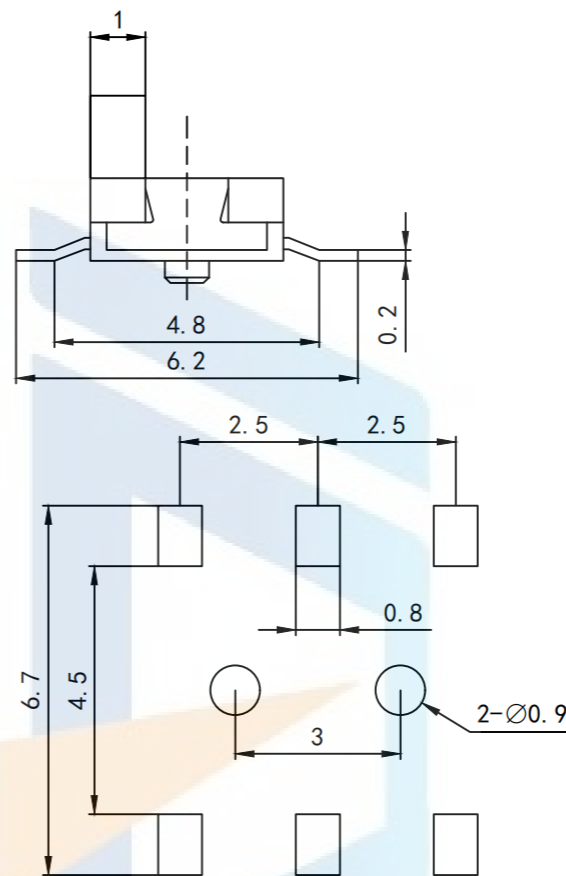
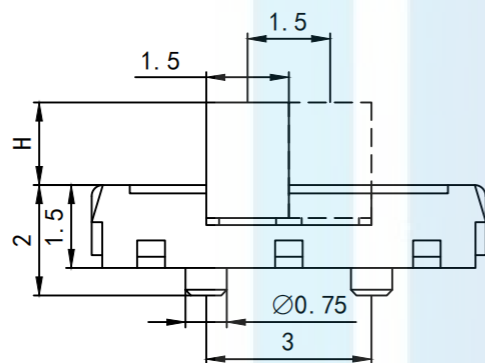
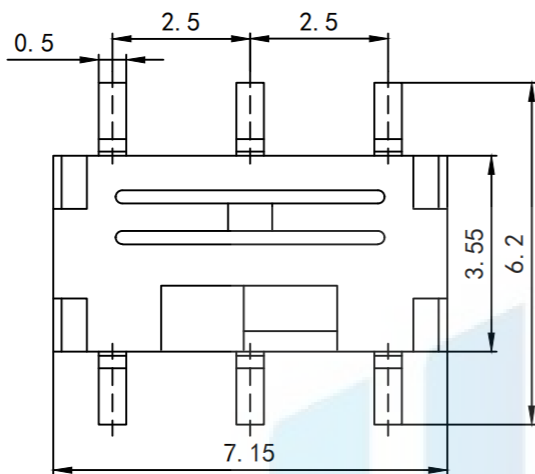




RoHS2.0  
Compliant ✓



Technical requirements:  
 Rated electrical load: DC12V 0.1A  
 Insulation Resistance:  $\geq 100M\Omega$   
 Compressive Strength: AC250V (50Hz) 1min  
 Ambient Temperature:  $-25^{\circ}C \sim +70^{\circ}C$   
 Relative humidity: ( $40^{\circ}C$ )  $\leq 95\%$   
 Contact Resistance:  $\leq 50M\Omega$   
 Actuation:  $170gf \pm 20gf$   
 Temperature Resistance:  $250^{\circ}$   
 Life span: 10000 times

TOLERANCE	X. XXX	$\pm 0.05$	 东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	<a href="https://www.hq-dz.com">https://www.hq-dz.com</a>		phone: 15812872448	
	X. XX	$\pm 0.15$		TITLE: 迷你拨动开关		PART NO: MSS-22C02立贴带槽	
	X. X	$\pm 0.20$			DRAWING NO: 7.2*3.5*1.5*H		
	X.	$\pm 0.30$					
	ANGLE	$\pm 5.0^{\circ}$					
PROTECTON 	DRAWN:		DATE:	18-10-08	UNIT:	mm	
	CHECKED:		DATE:	18-10-08	SCALE:	FULL	
	APPROVED:		DATE:	18-10-08	SIZE:	A4	