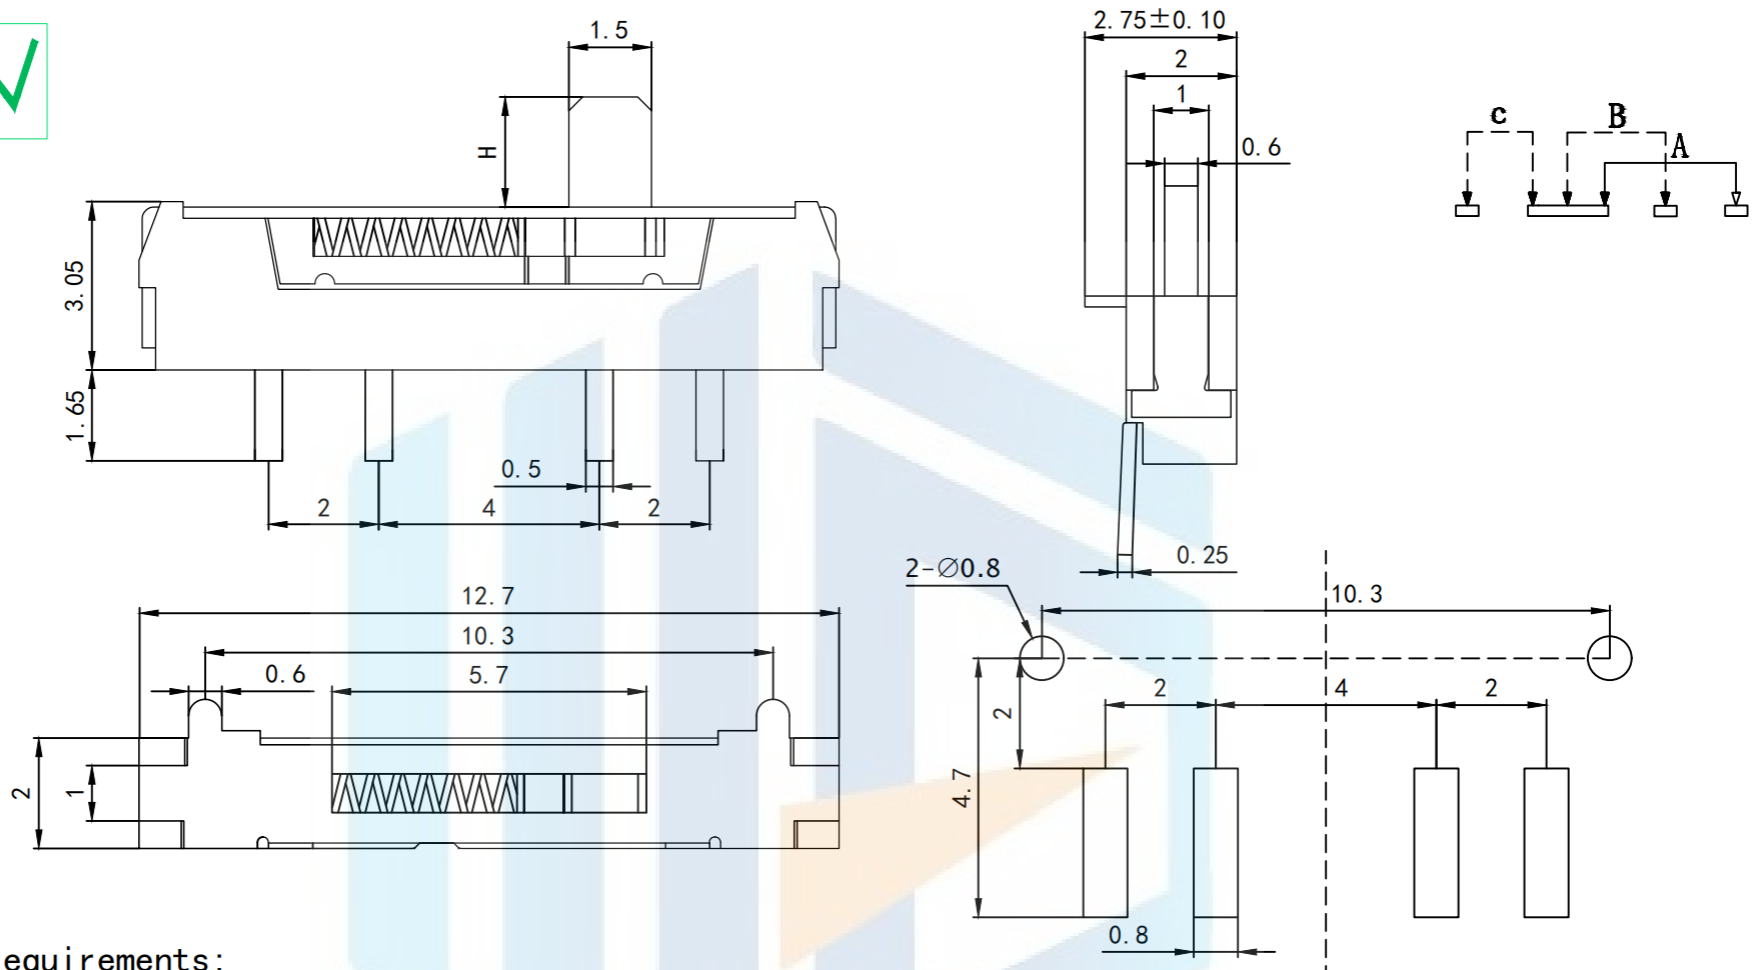




RoHS2.0  
Compliant



Technical requirements:  
 Rated electrical load: DC12V 0.1A  
 Insulation Resistance:  $\geq 100M\Omega$   
 Compressive Strength: AC250V (50Hz) 1min  
 Ambient Temperature:  $-25^{\circ}C \sim +70^{\circ}C$   
 Relative humidity: ( $40^{\circ}C$ )  $\leq 95\%$   
 Contact Resistance:  $\leq 50M\Omega$   
 Actuation:  $200gf \pm 30gf$   
 Temperature Resistance:  $250^{\circ}$   
 Life span: 10000 times

TOLERANCE	X. XXX	$\pm 0.05$	 东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
	X. XX	$\pm 0.15$		
PROTECTON	X. X	$\pm 0.20$	https://www.hq-dz.com      phone:15812872448 迷你拨动开关      PART NO:MST-13D18右复位 DRAWING NO:12.7*2.0*3.0*H	
	X.	$\pm 0.30$		
	ANGLE	$\pm 5.0^{\circ}$	DRAWN:	
			CHECKED:	
			APPROVED:	
			DATE: 18-10-08	UNIT: mm
			DATE: 18-10-08	SCALE: FULL
			DATE: 18-10-08	SIZE: A4