

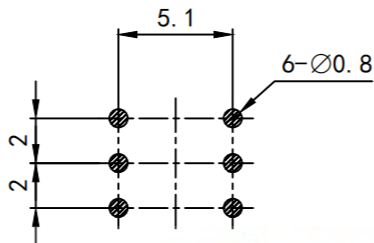









RoHS2.0
Compliant

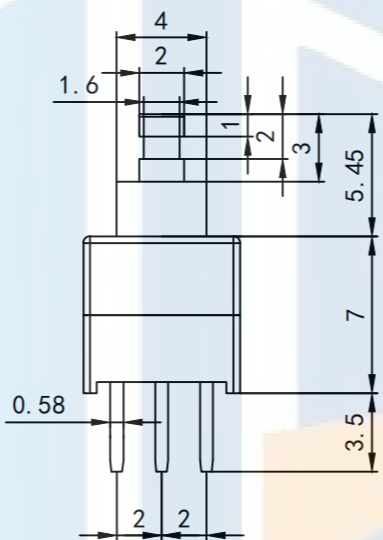


P. C. B LAYOUT

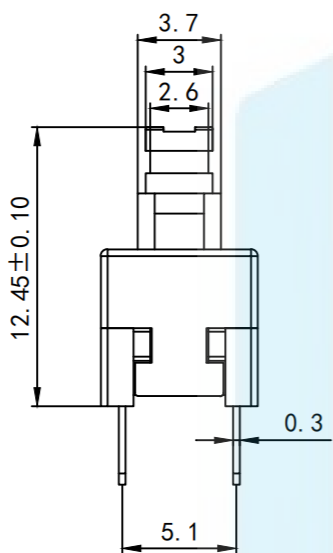




SPECIFICATION:

1. Rated voltage :DC 50V 0.3A
2. Contact resistance :30MΩ MAX less than 30Mω
3. Insulation resistance :100MΩ MIN 100 megohm or more
4. Compressive strength :AC500V(50/60Hz)1 minute sensitivity current is 0.5mA
5. Operating temperature: -16°C±60°C
6. Mechanical life: 10,000 cycles

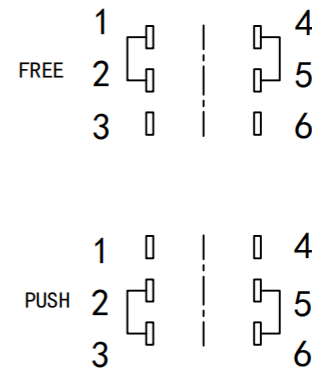

CIRCUIT DIAGRAM

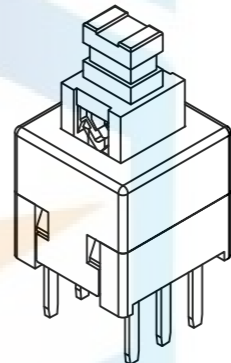

TOLERANCE		 东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
X. XXX	±0.05		
X. XX	±0.15	https://www.hq-dz.com phone:15812872448	
X. X	±0.20	TITLE: 按键开关 自(无)锁	
X.	±0.30	PART NO:7*7双排6脚高头 DRAWING NO:7*7*12.45	
ANGLE	±5.0°	DATE: 18-10-08 UNIT: mm	
PROTECTON		DATE: 18-10-08 SCALE: FULL	
		DATE: 18-10-08 SIZE: A4	
DRAWN:		DATE: 18-10-08	
CHECKED:		DATE: 18-10-08	
APPROVED:		DATE: 18-10-08	