
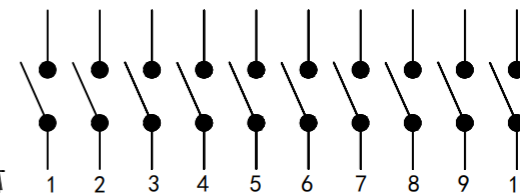
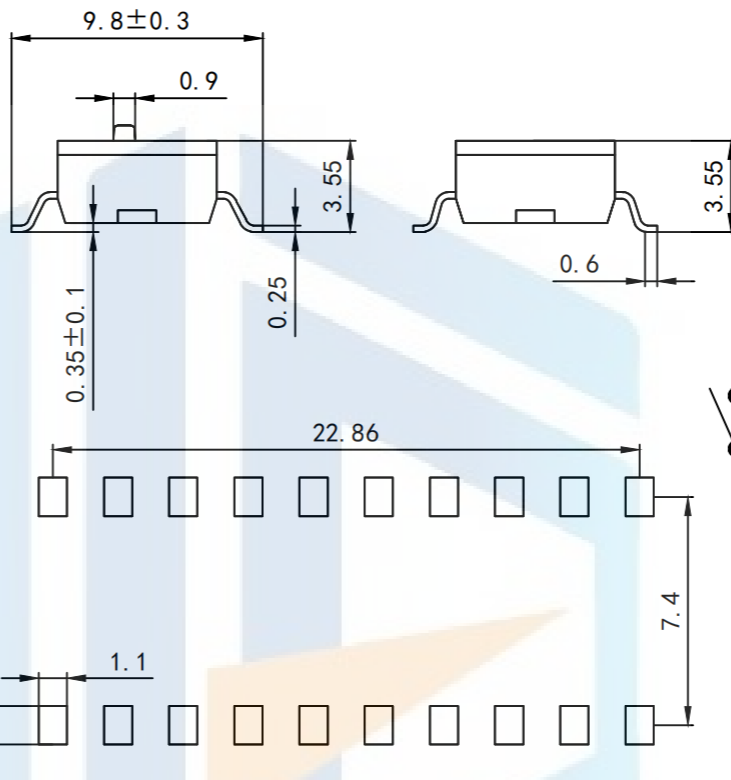


RoHS2.0  
Compliant ✓

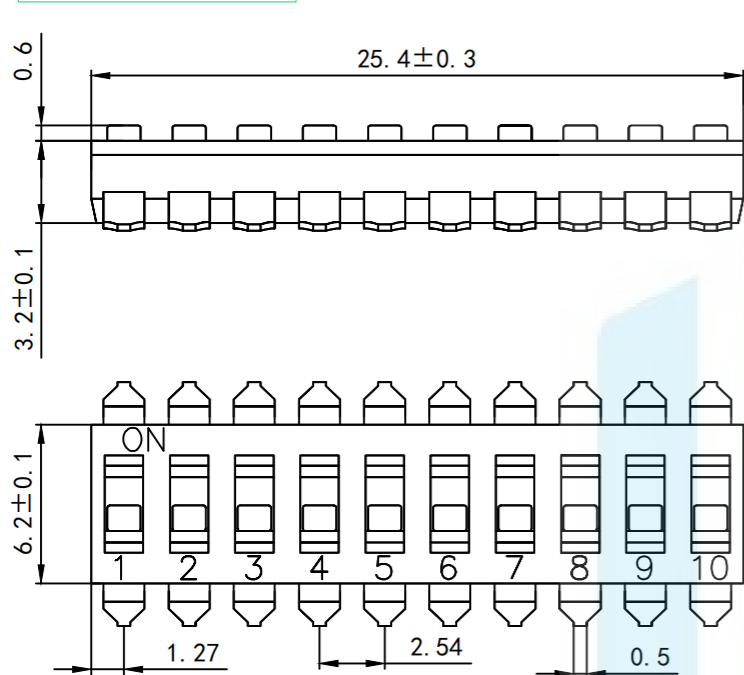

**Specification:**

Electrical life: 2000 times  
rated current:

No Switching: 100mA@50VDC

Switching: 25mA@24VDC

Insulation Resistance: 100MΩ@250VDC

Contact Resistance: 50mΩmax

Dielectric strength: 500VAC/1min


Operating force: 500gfmax

Operating temperature: -30°C to 85°C (no ice)

**TOLERANCE**

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

**PROTECTON**



东莞市恒祺电子科技有限公司  
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

**TITLE:**

拨码开关

PART NO: BIS010

DRAWING NO: 25.4\*3.2\*2.54

DRAWN:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

18-10-08

18-10-08

18-10-08

UNIT:  
mm

SCALE:  
FULL

SIZE:  
A4