





RoHS2.0
Compliant

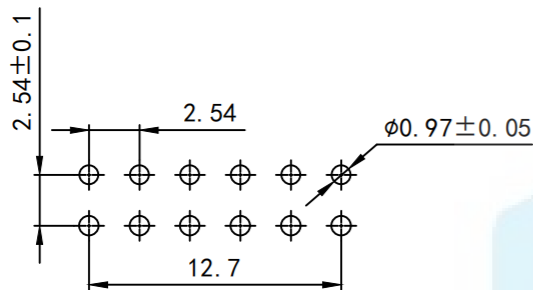



PCB开孔

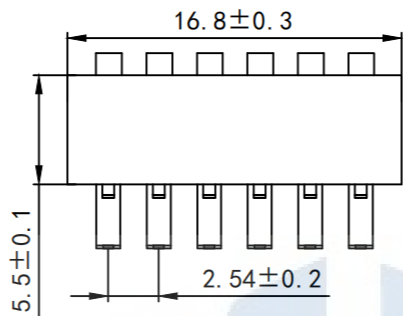

平推钮 (R)

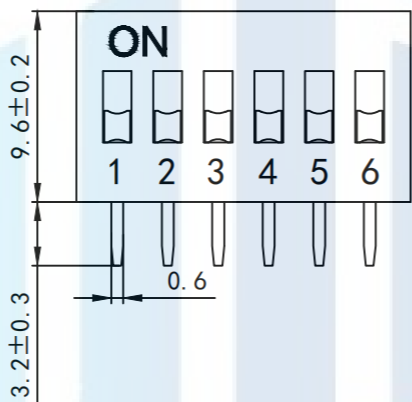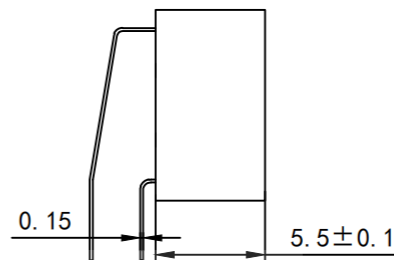

高推钮 (E)

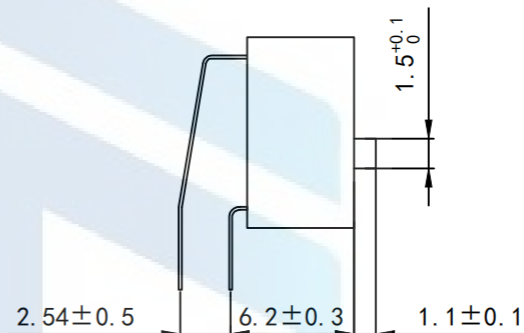

电路图

Switching features:

1. Lifting capacity: 25mA at 24VDC
2. Insulation resistance: 100MΩ at 250VDC
3. Contact resistance: 50mΩ max
- Dielectric strength: 500VAC /1min,
5. Operating force: 1000gf max
6. Electrical life: 2000 times
7. Applicable temperature: -20°C to 70°C (no icing)
8. Welding requirements:
Manual soldering: 320° C no more than 2seconds, (30 watt soldering iron max).
Wave soldering: 260°C no more than 5 seconds, the switch is in a disconnected state during soldering and cleaning
9. The switch is in a disconnected state when leaving the factory.

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd			
		https://www.hq-dz.com phone: 15812872448			
PROTECTON 	DRAWN: CHECKED: APPROVED:	薄码开关		PART NO: DAE006	
		DRAWING NO: 16.8*5.5*2.54		DATE: 18-10-08	UNIT: mm
		DATE: 18-10-08		DATE: 18-10-08	SCALE: FULL
DATE: 18-10-08		DATE: 18-10-08	SIZE: A4		