


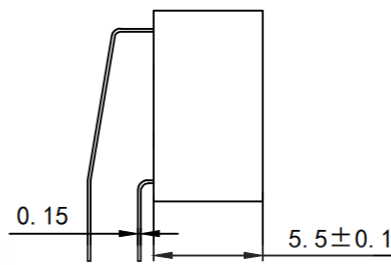




RoHS2.0  
Compliant

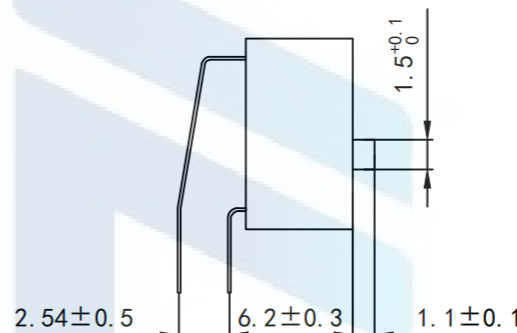

平推钮 (R)

电路图

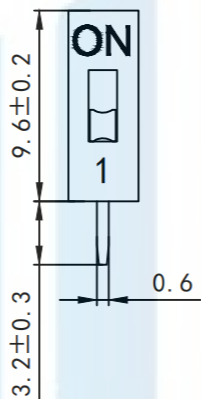

高推钮 (E)

PCB开孔

Switching features:

1. Lifting capacity: 25mA at 24VDC
2. Insulation resistance: 100MΩ at 250VDC
3. Contact resistance: 50mΩ max
- Dielectric strength: 500VAC /1min,
5. Operating force: 1000gf max
6. Electrical life: 2000 times
7. Applicable temperature: -20°C to 70°C (no icing)
8. Welding requirements:

Manual soldering: 320° C no more than 2seconds, (30 watt soldering iron max).

Wave soldering: 260°C no more than 5 seconds, the switch is in a disconnected state during soldering and cleaning

9. The switch is in a disconnected state when leaving the factory.

TOLERANCE			东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd		
X. XXX	±0.05		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a>		phone: 15812872448
X. XX	±0.15		TITLE: 拨码开关		PART NO: DAE001
X. X	±0.20		DRAWING NO: 3.54*2.54		
X.	±0.30		DRAWN:		DATE: 18-10-08
ANGLE	±5.0°	CHECKED:		DATE: 18-10-08	
PROTECTON 		APPROVED:		DATE: 18-10-08	
				UNIT: mm	
				SCALE: FULL	
				SIZE: A4	