






RoHS2.0  
Compliant

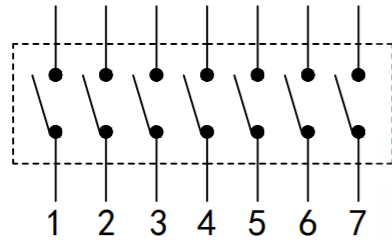

电路图

Switching features:

1. Lifting capacity: 25mA at 24VDC
2. Insulation resistance: 100MΩ at 250VDC
3. Contact resistance: 50MΩ max
4. Dielectric strength: 500VAC/1min,
5. Operating force: 1000gf max
6. Electrical life: 2000 times
7. Applicable temperature: -20°C to 70°C (no icing)
8. Welding requirements:
  - Manual soldering: 320°C no more than 2seconds, (30 watt soldering iron max.
  - Wave soldering: 260°C no more than 5 seconds, the switch is in a disconnected state during soldering and cleaning
9. The switch is in a disconnected state when leaving the factory.

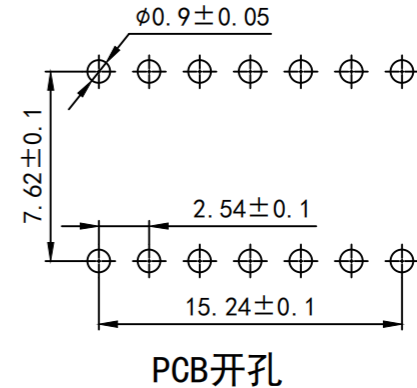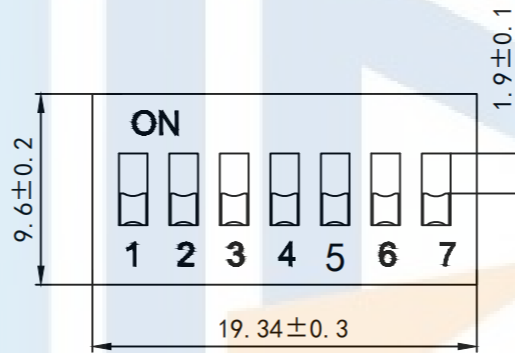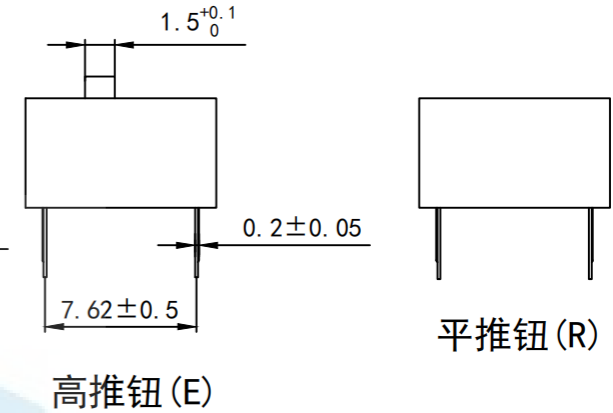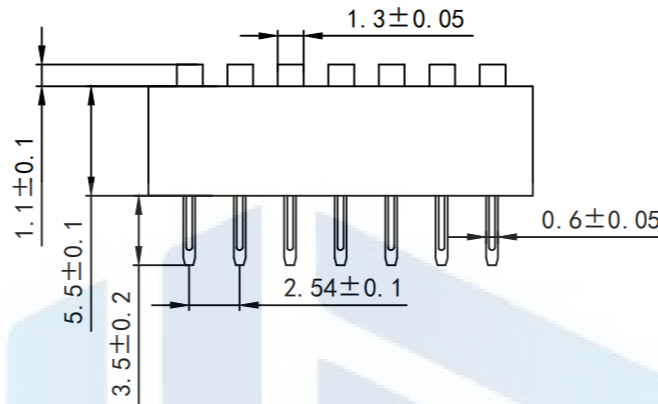

TOLERANCE			东莞市恒祺电子科技有限公司		
X. XXX	±0.05		Dongguan Hengqi Electronic Technology Co., Ltd		
X. XX	±0.15		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a> phone:15812872448		
X. X	±0.20		TITLE: 拨码开关		PART NO: DSE007
X.	±0.30		DRAWING NO: 19.34*5.5*2.54		
ANGLE	±5.0°	APPROVED:		DATE: 18-10-08	UNIT: mm
PROTECTON		DRAWN:		DATE: 18-10-08	SCALE: FULL
		CHECKED:		DATE: 18-10-08	SIZE: A4
		APPROVED:		DATE: 18-10-08	