
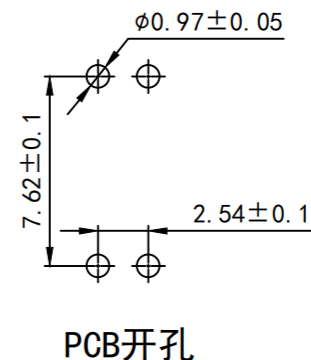
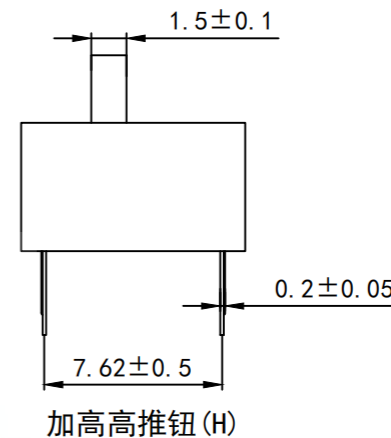
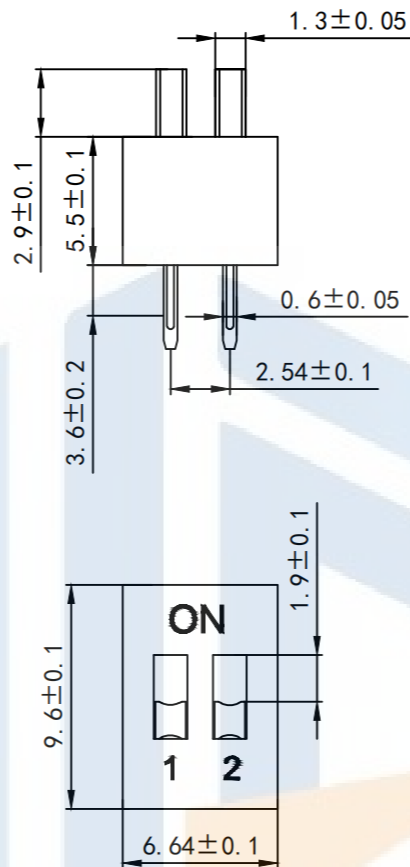


RoHS2.0  
Compliant




Switching features:

1. Lifting capacity: 25mA at 24VDC
2. Insulation resistance: 100MΩ at 250VDC
3. Contact resistance: 50MΩ max
4. Dielectric strength: 500VAC/1min,
5. Operating force: 1000gf max
6. Electrical life: 2000 times
7. Applicable temperature: -20°C to 70°C (no icing)
8. Welding requirements:
  - Manual soldering: 320°C no more than 2seconds, (30 watt soldering iron max.
  - Wave soldering: 260°C no more than 5 seconds, the switch is in a disconnected state during soldering and cleaning
9. The switch is in a disconnected state when leaving the factory.

TOLERANCE

|        |       |
|--------|-------|
| X. XXX | ±0.05 |
| X. XX  | ±0.15 |
| X. X   | ±0.20 |
| X.     | ±0.30 |
| ANGLE  | ±5.0° |

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

拨码开关

PART NO: DSE002

DRAWING NO: 6.64\*5.5\*2.54

DRAWN:

DATE:

18-10-08

UNIT:  
mm

CHECKED:

DATE:

18-10-08

SCALE:  
FULL

APPROVED:

DATE:

18-10-08

SIZE:  
A4