


RoHS2.0
Compliant

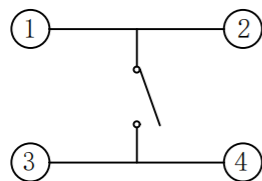



电路图

Key Technical Specifications:



1. Rating: 50mA DC12V
2. Contact resistance: $\leq 50m\Omega$
3. Operating force: $160 \pm 40gf$
4. Itinerary: $0.20 \pm 0.1mm$
5. Insulation resistance: $\geq 100M\Omega$
6. Electrical strength: 250V 50HZ 1Min.
7. life span: 50,000 Cycles

Material:

- Body: LCP (Black)
- Button: PPA (black)
- Clip: Phosphor copper (silver-plated)
- Shrapnel: Stainless steel (silver-plated)
- Cover: Stainless steel
- Dust film: PE

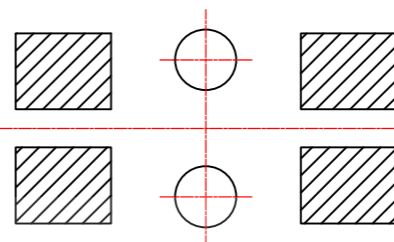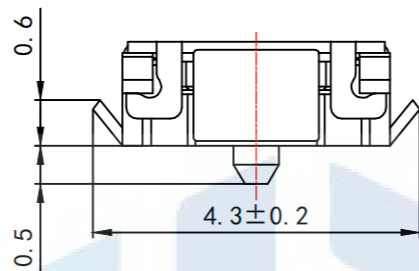

PCB. 焊接图

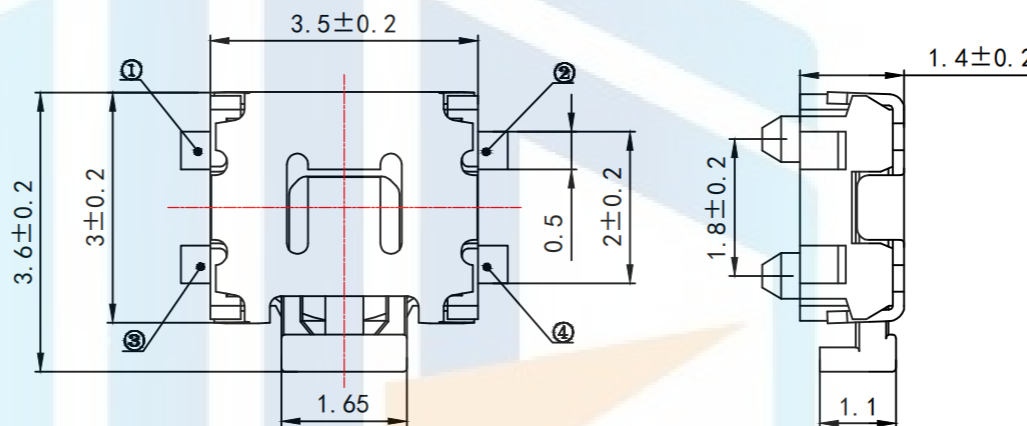

TOLERANCE			东莞市恒祺电子科技有限公司		
X. XXX	±0.05		Dongguan Hengqi Electronic Technology Co., Ltd		
X. XX	±0.15	https://www.hq-dz.com		phone:15812872448	
X. X	±0.20	TITLE: 轻触开关		PART NO:HQ-TS-A009C	
X.	±0.30	DRAWING NO:3*3.5*3.6U脚			
ANGLE	±5.0°	APPROVED:		DATE: 18-10-08	
PROTECTON		DRAWN:	DATE: 18-10-08	UNIT: mm	
		CHECKED:	DATE: 18-10-08	SCALE: FULL	
		APPROVED:	DATE: 18-10-08	SIZE: A4	