

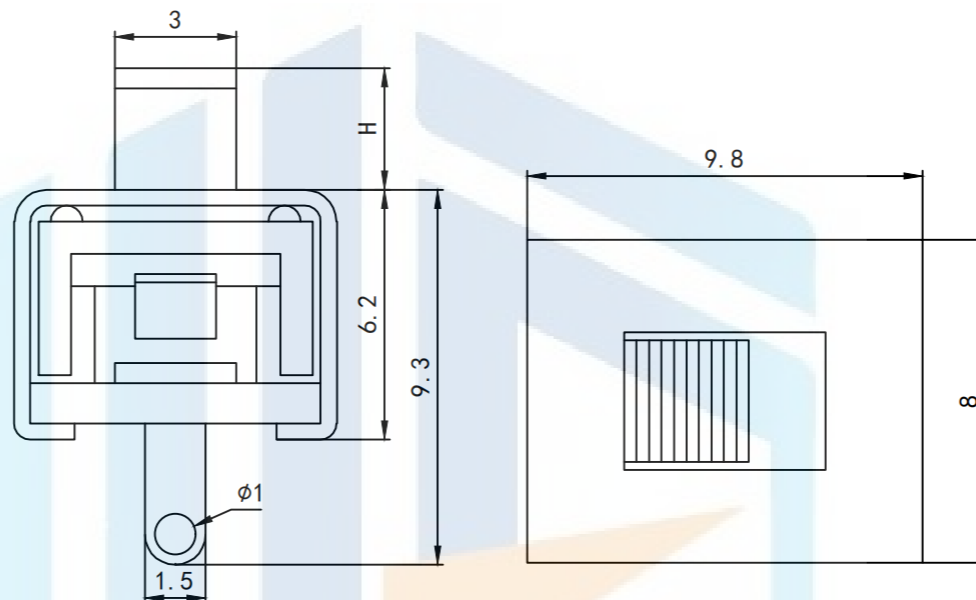
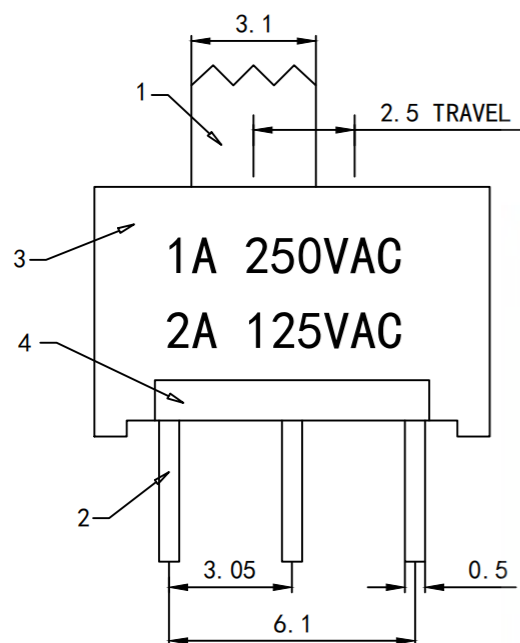




RoHS2.0
Compliant



SCHEMATIC

Rated voltage :1A 250VAC
 Contact resistance :100MΩ MAX less than 30MΩ
 Insulation resistance :100MΩ MIN 100 megohm or more
 Compressive strength :AC500V (50/60Hz) 1 minute sensitivity current is 0.5mA
 Operating temperature: $-16^{\circ}\text{C} \pm 60^{\circ}\text{C}$
 Mechanical life: 10,000 cycles

TOLERANCE X. XXX ± 0.05 X. XX ± 0.15 X. X ± 0.20 X. ± 0.30 ANGLE $\pm 5.0^{\circ}$	 东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	https://www.hq-dz.com phone:15812872448		
		TITLE: 拨动开关		
PROTECTON 	DRAWN:	DATE:	18-10-08	UNIT: mm
	CHECKED:	DATE:	18-10-08	SCALE: FULL
	APPROVED:	DATE:	18-10-08	SIZE: A4