


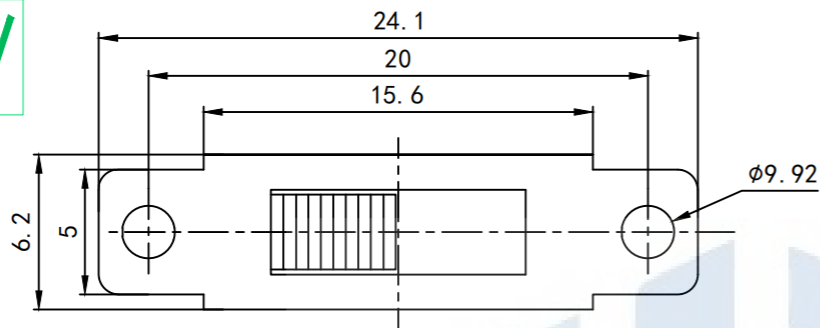
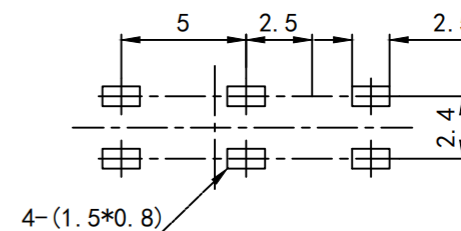


RoHS2.0
Compliant

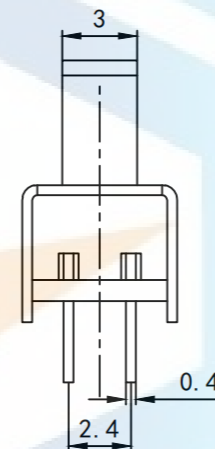

SCHMATIC

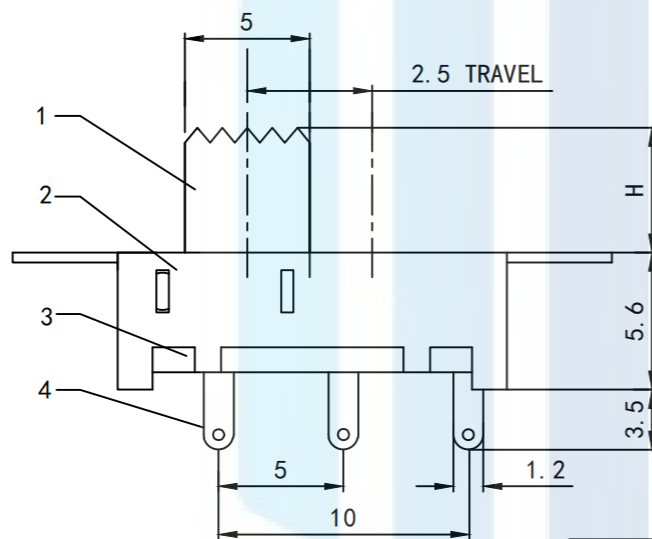

P. C. B LAYOUT
BOTTOM VIEW


Specification:

1. Rating: DC 50V 0.3A
2. Contact resistance: <math><100\text{ m}\Omega</math>
3. Insulation resistance: >100 M Ω (DC 250V/Min)
4. Electronics life: 5000 cycles
5. Operation force: $300 \pm 100\text{gf}$
6. All materials are Rohns compliant

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^\circ$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

拨动开关

PART NO: SS-22E04

DRAWING NO: 24.1*6.2*H

DRAWN:

DATE: 18-10-08

UNIT:
mm

CHECKED:

DATE: 18-10-08

SCALE:
FULL

APPROVED:

DATE: 18-10-08

SIZE:
A4