

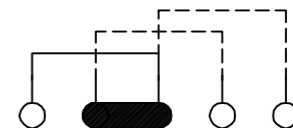
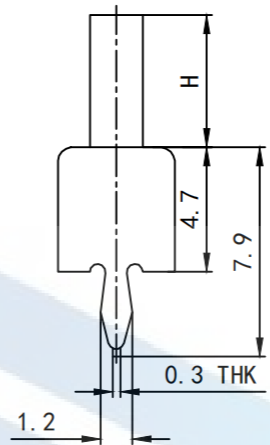
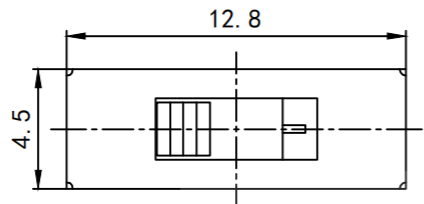


RoHS2.0
Compliant

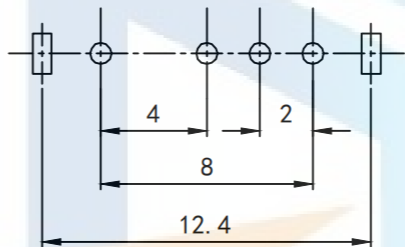

SCHEMATIC (SHORTING)

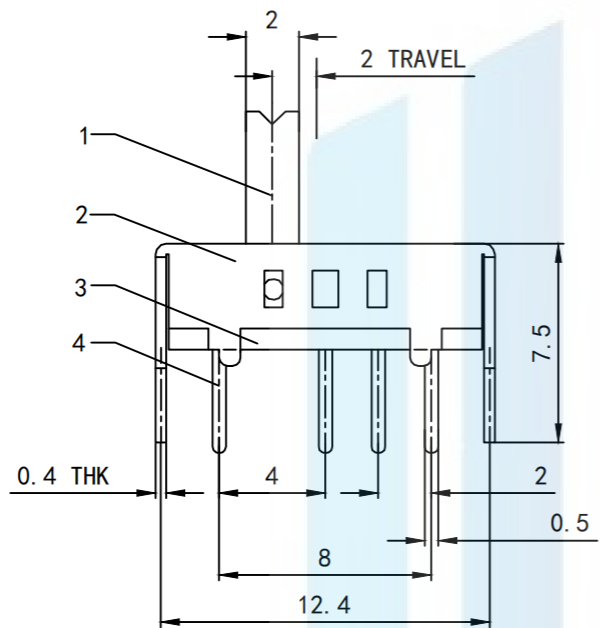

P.C.B LAYOUT
BOTTOM VIEW

Technical requirement
 Rated voltage :DC 50V 0.3A
 Contact resistance :30MΩ MAX less than 30Mω
 Insulation resistance :100MΩ MIN 100 megohm or more
 Compressive strength :AC500V (50/60Hz) 1 minute
 sensitivity current is 0.5mA
 Operating temperature: -16°C±60°C
 Mechanical life: 10,000 cycles

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd			
		https://www.hq-dz.com phone:15812872448			
PROTECTON 	DRAWN: CHECKED: APPROVED:	TITLE: 拨动开关		PART NO: SS-13D01	
				DRAWING NO: 12.8*4.5*H	
		DATE: 18-10-08	UNIT: mm		
	DATE: 18-10-08	SCALE: FULL			
	DATE: 18-10-08	SIZE: A4			