
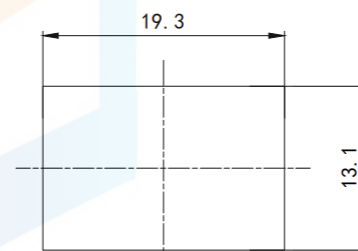
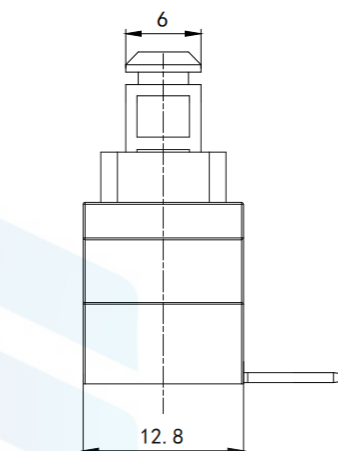
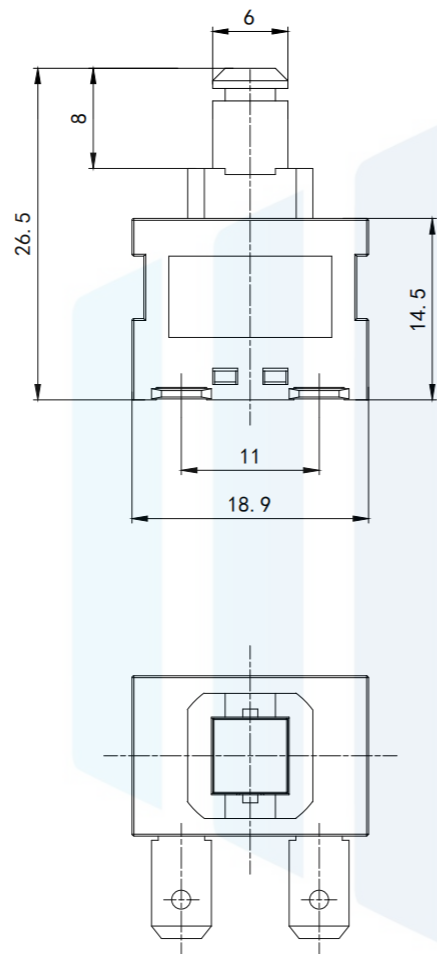




RoHS2.0
Compliant ✓



安装尺寸

The Main hchnology

1. Circuit: 
2. Rated voltage: 12 (10) A 250V[~]
Rated current: 12 (10) A 250V[~]
3. Insulated resistance: $\geq 100M\Omega$
4. Contact resistance: $\leq 100M\Omega$
5. Dielectric strength: $\geq 500V/5S$
6. Endurance: ≥ 10000 次
7. Ambient temperature: T85

| | | | | | |
|--|---|--|--------------------|----------|-------------|
| TOLERANCE |  | 东莞市恒祺电子科技有限公司 | | | |
| | | Dongguan Hengqi Electronic Technology Co., Ltd | | | |
| X. XXX ± 0.05 X. XX ± 0.15 X. X ± 0.20 X. ± 0.30 ANGLE $\pm 5.0^\circ$ | https://www.hq-dz.com | | phone: 15812872448 | | |
| | TITLE: 按钮开关 | | PART NO: PBS-07A | | |
| PROTECTON  | DRAWN: | | DATE: | 18-10-08 | UNIT: mm |
| | CHECKED: | | DATE: | 18-10-08 | SCALE: FULL |
| | APPROVED: | | DATE: | 18-10-08 | SIZE: A4 |
| | | DRAWING NO: 19.3*13.1 | | | |