
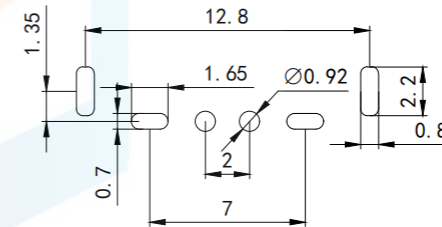
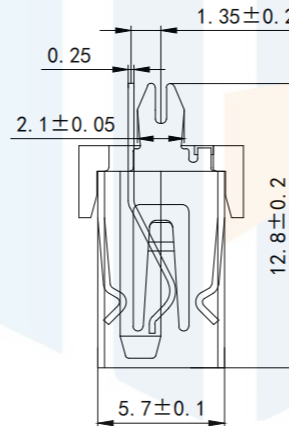
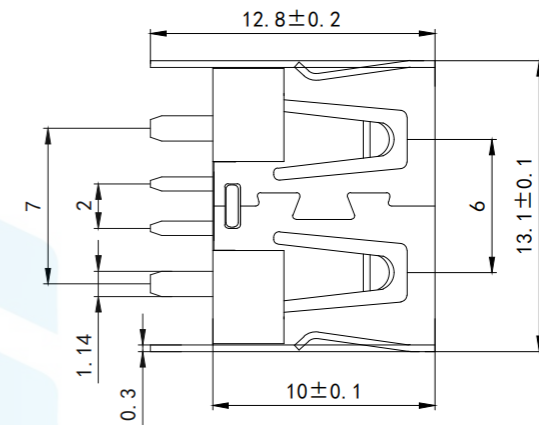


RoHS2.0
Compliant

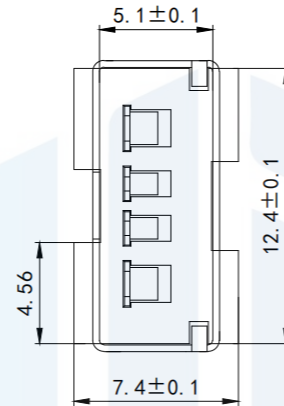

Specifications:Electrical:

1. Rated current: Current Rating

2A/contact terminal

2. Voltage Rating

30V DC

3. Contact Resistance

30 milliohms MAX

4. Withstand voltage: Dielectnic Withstanding
Voitage:

500 VAC AT Sea Levot

5. Lnsulation Resistance:

1000MEGA ohms MIN

Physical Properties: Mechanical:

1. Plugging Force: Cnnector Mate and Unmate
Force

Mate force:3.57kgf (MAX) Unmate force:1.02kgf (MIN)

2. Terminal Retenion: Terminal Retenion

1.2kgf (MIN) Raw Material: Matorial:

1. Plastic:Housing:

Hing Temperature Tnermaplastics, UI 94V-0 PBT

White/Black

2. Terminal: Contact: Copper Alloy C2680



3.Shell: Copper Alloy C2680/SPCC Plating: Finish:

1.Terminal: Contact: Plated Gold in Mating Area;

Tin On Solder Talls

2. Shell:

Niokol Plating

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
		https://www.hq-dz.com phone:15812872448	
PROTECTON 	DRAWN:	PART NO: USB2.0-B100	
	CHECKED:	DRAWING NO: 13.1*10.0*5.7	
	APPROVED:	DATE: 18-10-08	UNIT: mm
		DATE: 18-10-08	SCALE: FULL
		DATE: 18-10-08	SIZE: A4

TITLE:
USB2.0 A/F 180度10.0大电流直边