


RoHS2.0
Compliant

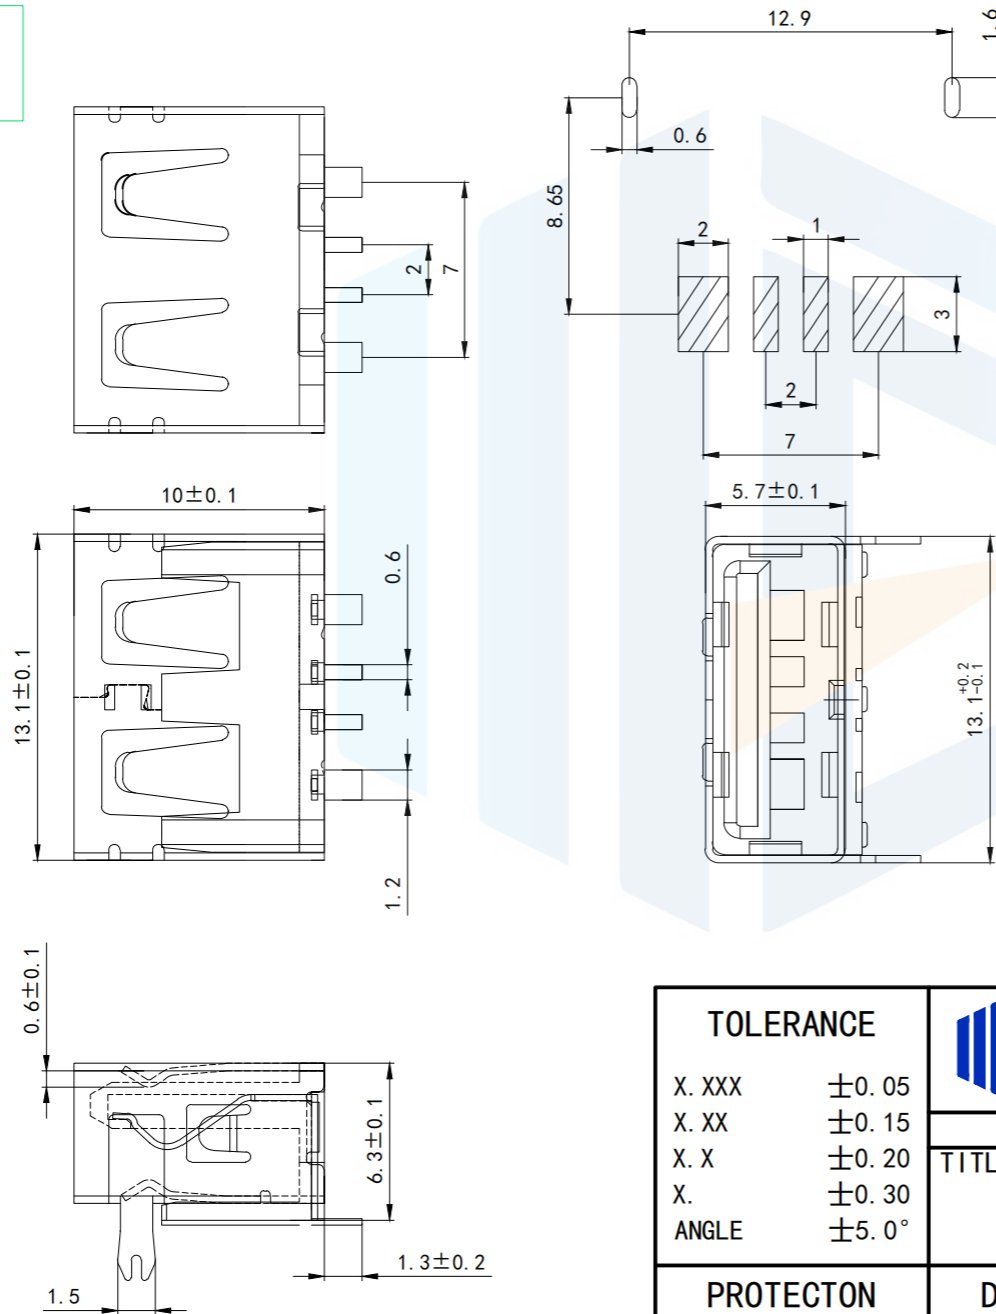

Specifications:

Electrical:

- Current Rating: 3.0A/contact terminal
- Working Voltage: Voltage Rating: 30V DC
- Resistance: Contact: 30 milliohms MAX
- Dielectric Withstanding Voltage: 500 VAC AT Sea Level
- Insulation Resistance: 1000MEGA ohmsMIN

Physical Properties: Mechanical:

- Connector Mating and Unmating Force: 3.57kgf (MAX) / 1.02kgf (MIN)
- Terminal Retention: 1.0kgf (MIN)


Raw Materials: Material:

- Housing: Thermoplastics. Hinge Temperature: Good
- Contact: Copper Alloy C2680
- Shell: Copper Alloy C2680/SPCC Plating: Finish: Contact: Plated Gold in Mating Area; The Tin On Solder Tails terminals are plated with 0-50U" (MIN) nickel bottom around the perimeter and brushed gold 1U" 2. Shell: The iron case is surrounded by 50-80U (MIN) nickel plating

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTION



东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

USB A/F前2定位直边端子SMT
大电流

PART NO: USB2.0-B065

DRAWING NO: 13.1*10.0*5.7

DRAWN:

DATE: 18-10-08

UNIT: mm

CHECKED:

DATE: 18-10-08

SCALE: FULL

APPROVED:

DATE: 18-10-08

SIZE: A4