


RoHS2.0
Compliant

Specifications:Electrical:

1. Rated current: Current Rating
2A/contact terminal
2. Voltage Rating
30V DC
3. Contact Resistance
30 milliohms MAX
4. Withstand voltage: Dielectnic Withstanding
Voitage:
500 VAC AT Sea Levot
5. Lnsulation Resistance:
1000MEGA ohms MIN

Physical Properties: Mechanical:

1. Plugging Force: Cnnector Mate and Unmate
Force
Mate force:3.57kgf (MAX) Unmate force:1.02kgf (MIN)
2. Terminal Retenion: Terminal Retenion
1.2kgf (MIN) Raw Material: Matorial:
1. Plastic:Housing:
Hing Temperature Tnermaplastics, UI 94V-0 PBT
White/Black
2. Terminal: Contact: Copper Alloy C2680
3. Shell: Copper Alloy C2680/SPCC Plating: Finish:
1. Terminal: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. Shell:
Nickel Plating

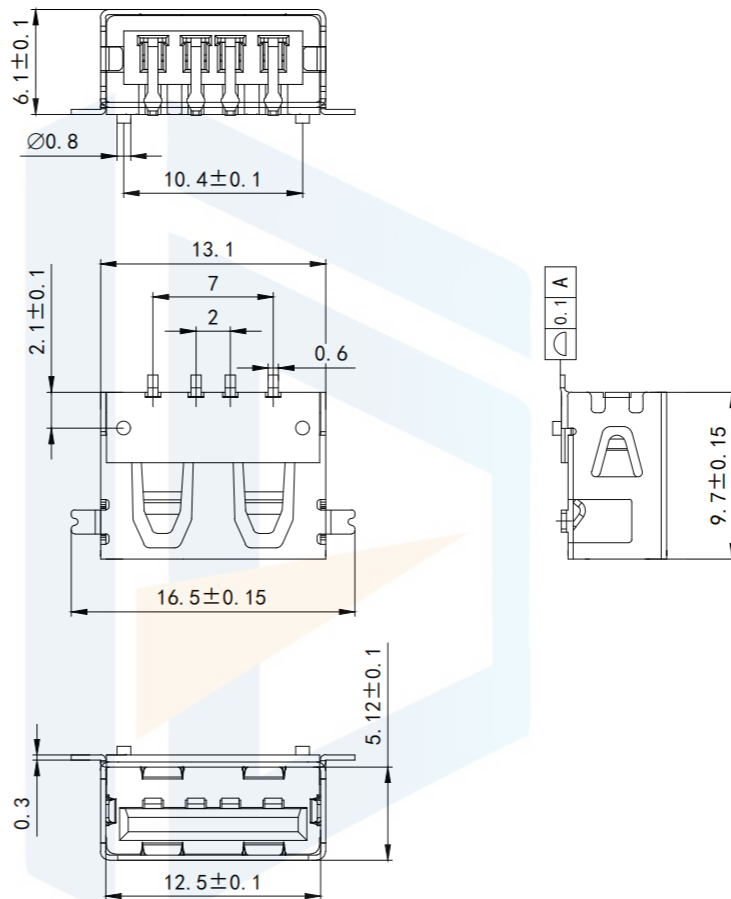

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd		
		https://www.hq-dz.com phone:15812872448		
PROTECTON 	DRAWN: CHECKED: APPROVED:	TITLE: USB A/F短体9.70两脚SMT 直边H=6.1		
		PART NO: USB2.0-A061		
		DRAWING NO: 12.5*9.7*6.1		
		DATE:	18-10-08	UNIT: mm
		DATE:	18-10-08	SCALE: FULL
		DATE:	18-10-08	SIZE: A4