
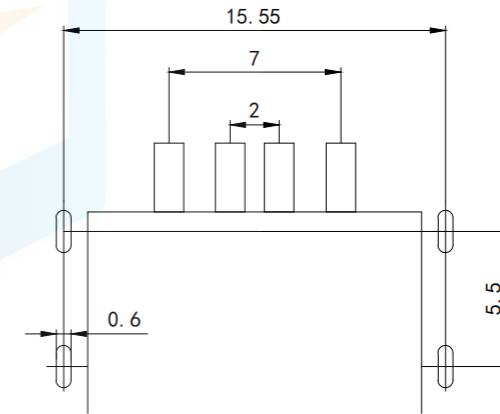
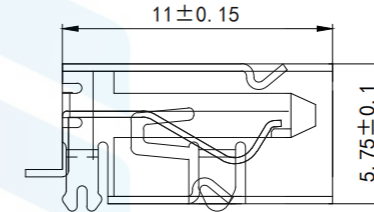
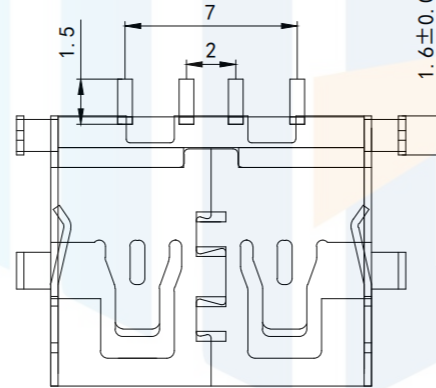
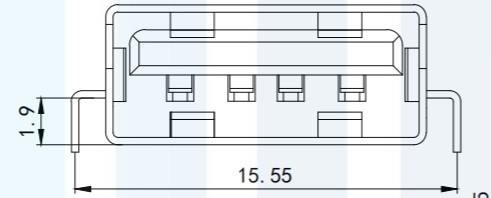


**RoHS2.0**  
Compliant

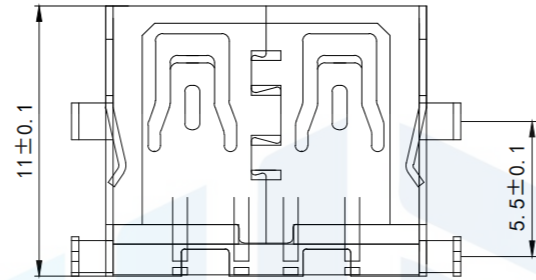

**Specifications:**

**Electrical:**

1. Current Rating  
1.5A/contact terminal
2. Weir voltage: Voltage Rating  
30V DC
3. Resistance: Contact  
30 milliohms MAX
4. Dielectnic Withstanding Voltage:  
500 VAC AT Sea Levol
5. Insulation Resistance: Lnsulation Resistance:  
1000MEGA ohmsMIN

**Physical Properties: Mechanical:**

1. Cnnector Mate Mate and  
Unmate ForceMate force: 3.57kgf (MAX)  
Unmate force: 1.02kgf (MIN)
2. Terminal Retenion  
1. 0kgf (MIN)

**Raw Materials:**

**Matorial:**

1. Housing: Tnermaplastics.  
Hing Temperature
2. Good: Contact: Copper Alloy C2680
3. :Shell: Copper Alloy C2680/SPCC


**Plating: Finish:**

1. Contact: Plated Gold in Mating Area;  
The Tin On Solder Tallls  
terminals are plated with 100-200U" (MIN) nickel  
bottom around the perimeter and brushed gold 1U'
2. :Shell:  
The iron case is surrounded by 80U (MIN)  
nickel plating

**TOLERANCE**

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

**PROTECTON**



**东莞市恒祺电子科技有限公司**  
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

**TITLE:**

USB A/F短体沉板1.9直边  
4定位脚外移插板

**PART NO:** USB2.0-A019

**DRAWING NO:** 11\*15.55\*5.75

**DRAWN:**

**CHECKED:**

**APPROVED:**

**DATE:** 18-10-08

**DATE:** 18-10-08

**DATE:** 18-10-08

**UNIT:**  
mm

**SCALE:**  
FULL

**SIZE:**  
A4