
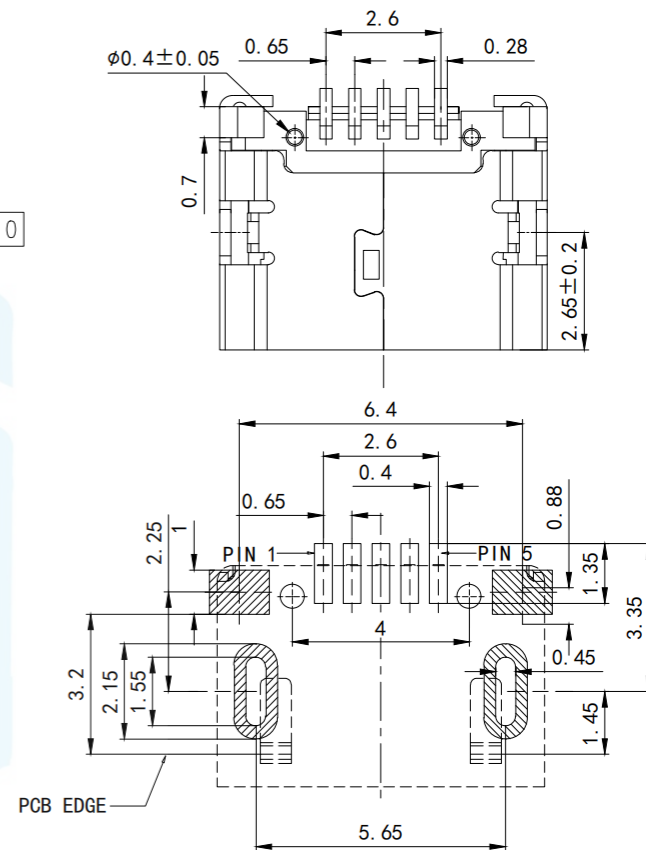
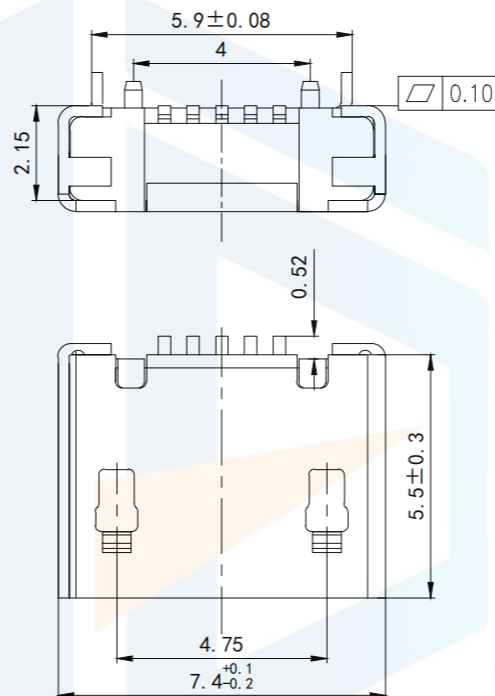


RoHS2.0
Compliant

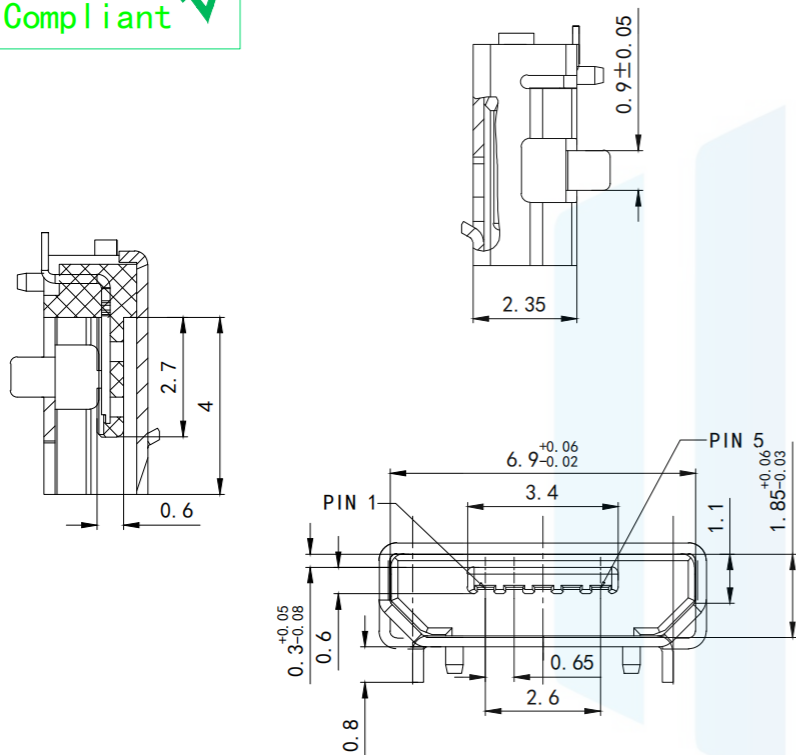

RECOMMENDED PCB LAYOUT
TOLERANCE: 0.05MM

Instructions:

1. Rubber core :LCP black; UL94V-0.
2. Terminal :C2680 T=0.15mm, half gold nickel G/F(functional area)
3. Shell: C2680T =0.25mm, tinned
4. Fixed current :1 A maximum.
5. Withstand voltage :100V(AC)/1 minute at least
6. Contact impedance: 50mΩ Max
7. Insulation impedance: 100MΩ minimum
8. Insertion force: 3.57Kgf Max.
9. Pullout power: 1.0Kgf initial minimum; After the test, 0.81 Kgf is the smallest
10. Temperature range : -30° C~+80° C

TOLERANCE	X. XXX	±0.05		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
	X. XX	±0.15		https://www.hq-dz.com	
	X. X	±0.20	phone:15812872448		
	X.	±0.30	TITLE: MICRO 5P 板上5.9普通款		
	ANGLE	±5.0°	PART NO:MICRO5P-BS0059		
PROTECTON 	DRAWN:		DATE:	18-10-08	UNIT: mm
	CHECKED:		DATE:	18-10-08	SCALE: FULL
	APPROVED:		DATE:	18-10-08	SIZE: A4