

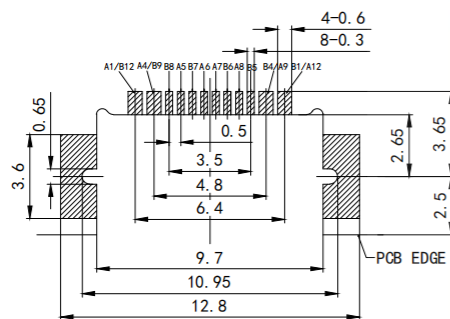



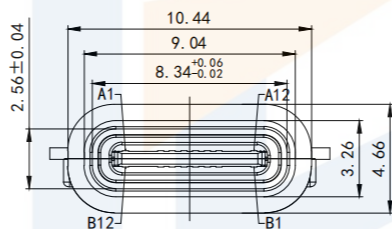



RoHS2.0  
Compliant

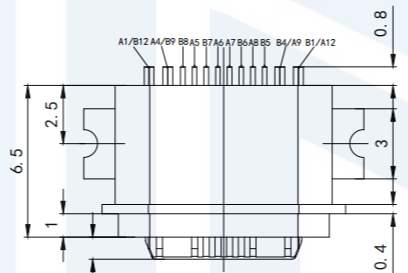

RECOMMEND P. C. B LAYOUT  
TOLERANCE UNSPECIFIED  $\pm 0.05$

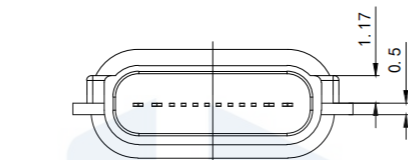

防水圈图



- NOTES:  
SPECIFICATION:
- CURRENT RATING: 3.0 A
  - VOLTAGE RATING: 3.0 V
  - VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX  
SHIELD: 50mΩ/MAX LLGR MAX. CHANGE OF ALL PINS: 10Ωm
  - INSULATION RESISTANCE: 100MΩ MIN
  - DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1MINUTE
  - INSERTION FORCE: 0.5~2.0kgf
  - UNMATING FORCE: 0.8-2.0kgf
  - DURABILITY: 10000 CYCLES
  - OPERATING TEMPERATURE: -35° C~+85° C
  - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 210-230° C
  - WATERPROOF: IP-X7.

TOLERANCE	X. XXX	±0.05		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd		
	X. XX	±0.15		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a> phone:15812872448		
PROTECTON	X. X	±0.20		TITLE: TYPE C 16P 防水母座沉板1.6 L=6.5mm粉末冶金		PART NO:TYPE-C16P-CB165FS
	X.	±0.30		DRAWN: CHECKED: APPROVED:		DRAWING NO:10.44*4.66*6.5 DATE: 18-10-08 DATE: 18-10-08 DATE: 18-10-08
ANGLE		±5.0°				