
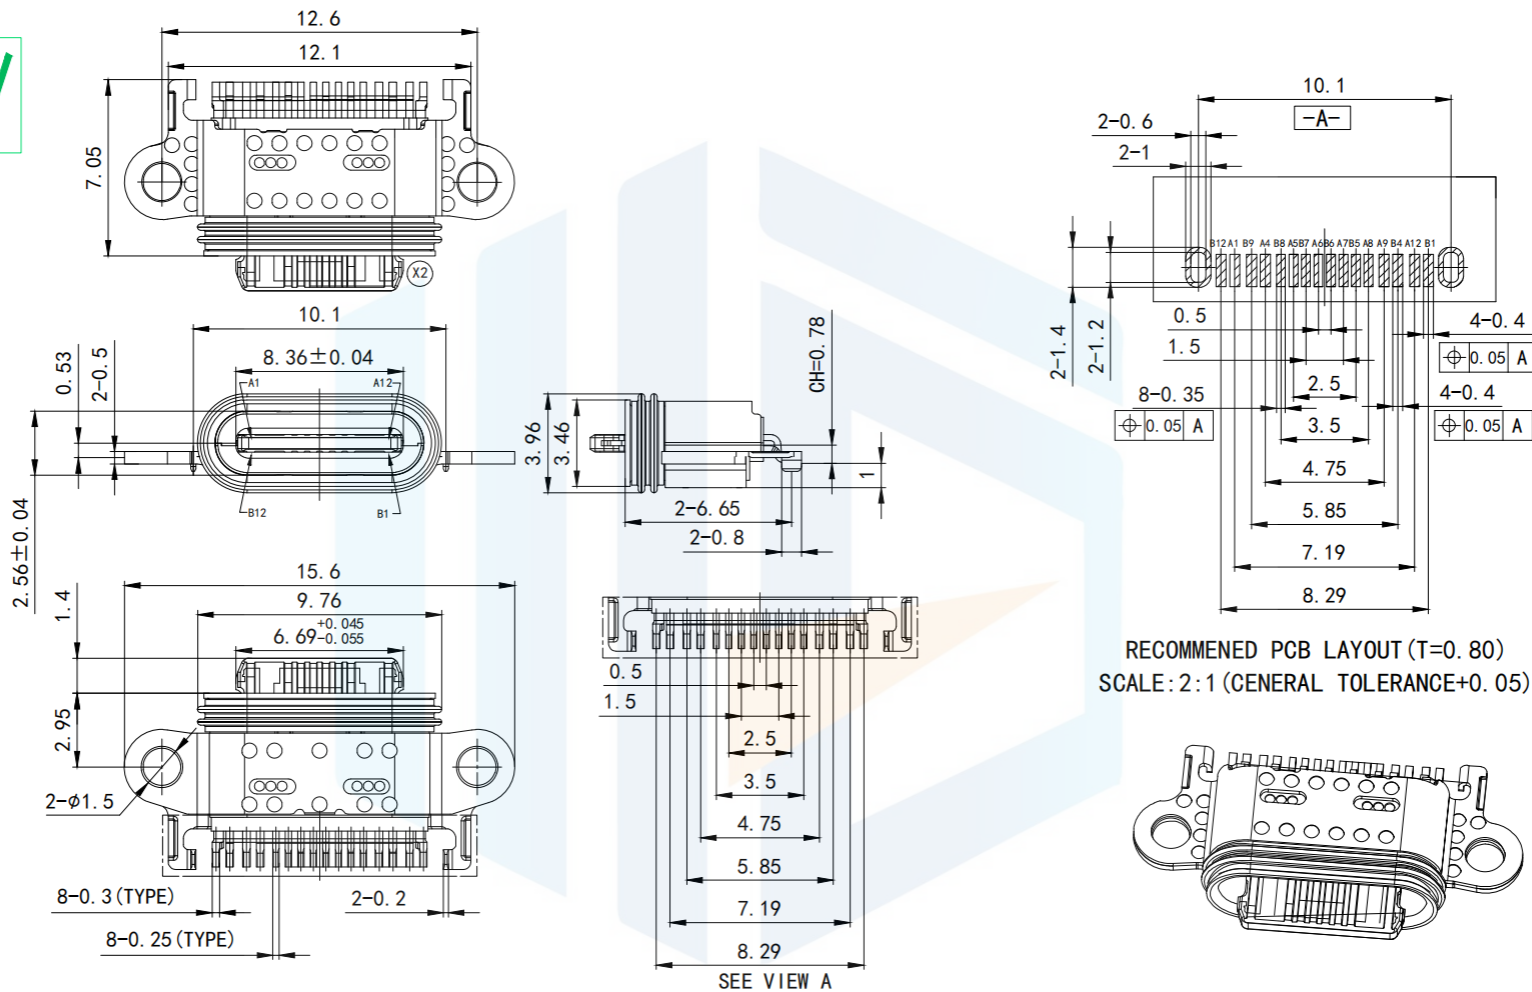


RoHS2.0
Compliant



NOTES:

1. CURRENT RATING:8A MAX
2. DIELECTRIC WITHSTANDING:100V AC MIN. ;
3. TEMPERATURE RANGE: -30°C~85°C ;
4. CONTACT RESISTANCE:40Ω MAX.
5. INSULATION RESISTANCE:100MΩ MIN. 00N
6. DURABILITY:10,000 CYCLES MIN. ;
7. INSERTION FORCE:5N~20N;
8. EXTRACTION FORCE:
(1) INITIAL:8N~20N;
(2) AFTER DURABILITY: 6N~20N
9. PRODUCT MEET THE REQUEST OF THE ROHS

TOLERANCE	X. XXX	±0.05		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
	X. XX	±0.15		https://www.hq-dz.com phone:15812872448	
PROTECTON 	X. X	±0.20	TITLE: TYPE C 16P沉板防水母座带螺丝孔 (RENO款)		PART NO:TYPE-C16P-CB278FS
	X.	±0.30	DRAWING NO:15.6*3.46*7.05		DATE: 18-10-08 UNIT: mm
	ANGLE	±5.0°	DRAWN:	CHECKED:	DATE: 18-10-08 SCALE: FULL
			APPROVED:	DATE: 18-10-08	SIZE: A4