


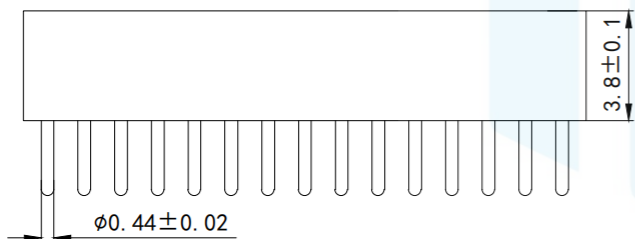


RoHS2.0
Compliant

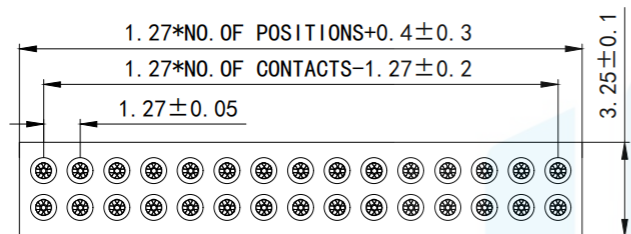

Technical Data

Pin(outer sleeve) :Brass,machined
 CuZn38Pb2C11p(Contact 6 Finger) :Beryllium copper,heat teated
 Insulator:PPS UL94V-0 colour:black
 Current rating:1Amps Mating pin p:0.305/0.483mm
 Forces:(polished steel gauge p0.38mm)-Insertion:0.5N
 typ-Withdrawal:0.2N typ Mechanical life:min 500cycles
 Contact resistance:max 10m Dielectric strength:min 1000V
 RMS Operaling temperature:-40° C to+105° C
 Soldering temperature:+255° C

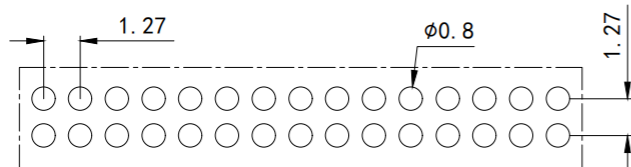

RECOMMENDED P. C. B
LAYOUT (±0.05)

TOLERANCE			东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd				
X. XXX	±0.05		https://www.hq-dz.com		phone:15812872448		
X. XX	±0.15	TITLE: 排母(圆针)		PART NO: FH-1.27-D2XX			
X. X	±0.20			DRAWING NO: 6.4*1.27*针位			
X.	±0.30	PROTECTON 		DRAWN:			
ANGLE	±5.0°			CHECKED:		DATE:	18-10-08
				APPROVED:		DATE:	18-10-08
				UNIT:	mm		
				SCALE:	FULL		
				SIZE:	A4		