

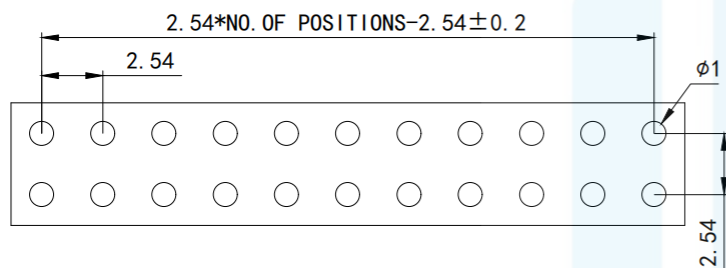
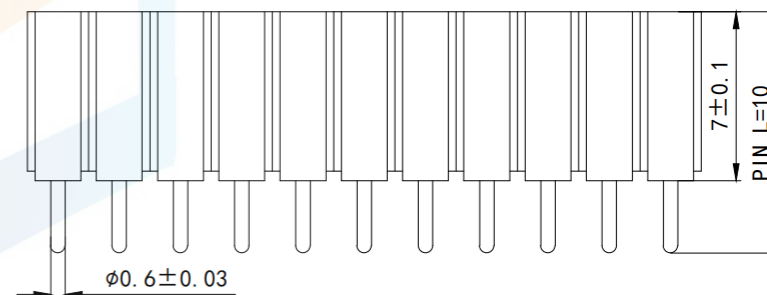


RoHS2.0  
Compliant

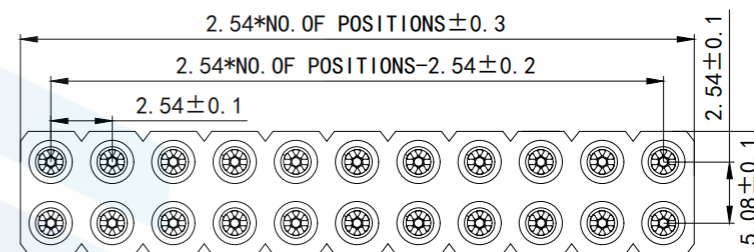

Recommended P.C.B  
Layout ( $\pm 0.05$ )



Technical Data

Pin(outer sleeve): Brass, machined CuZn38Pb2  
 Clip(Contact 6 Finger): Beryllium copper, heat treated

Insulator: PPS UL94V-0 colour: black

Current rating: 3Amps

Mating pin  $\phi$ : 0.635/0.889mm

Forces: (polished steel gauge  $\phi$  0.66mm)

-Insertion: 1.2N typ

-Withdrawal: 0.6N typ



Mechanical life: min 500cycles

Contact resistance: max 10m

Dielectric strength: min 1000V RMS

Operating temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

Soldering temperature:  $+255^{\circ}\text{C}$

<b>TOLERANCE</b> X. XXX $\pm 0.05$ X. XX $\pm 0.15$ X. X $\pm 0.20$ X. $\pm 0.30$ ANGLE $\pm 5.0^{\circ}$		<b>东莞市恒祺电子科技有限公司</b> Dongguan Hengqi Electronic Technology Co., Ltd		
		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a> phone: 15812872448		
<b>PROTECTON</b> 	<b>TITLE:</b> 排母(圆针双排)		<b>PART NO:</b> FH-2.54-DD2X	
	<b>DRAWN:</b>		<b>DRAWING NO:</b> 10*2.54*针位	
	<b>CHECKED:</b>	<b>DATE:</b> 18-10-08	<b>UNIT:</b> mm	<b>SCALE:</b> FULL
<b>APPROVED:</b>	<b>DATE:</b> 18-10-08	<b>SIZE:</b> A4		