


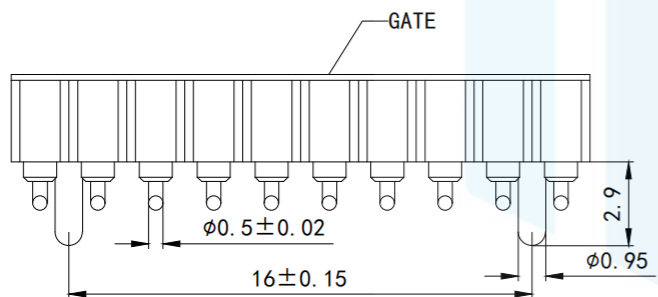


RoHS2.0  
Compliant

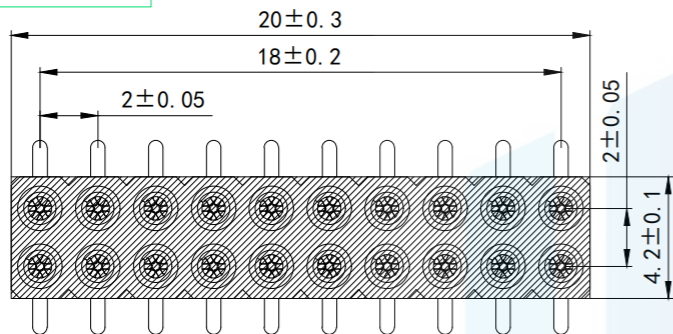

Technical Data

Pin(outer sleeve):Brass,machined CuZn38Pb2  
 Cllp(Contact 6 Finger):Beryllium copper,heat teated  
 Insulator:PPS UL94V-0 colour:black  
 Current rating:1Amps  
 Mating pin  $\phi$ :0.40/0.66mm  
 Forces:(polished steel gauge $\phi$ 0.46mm)  
 -Insertion:0.7N typ  
 -Withdrawal:0.4N typ  
 Mechanical life:min 500cycles  
 Contact resistance:max 10m  
 Dielectric strength:min 1000V RMS  
 Operating temperature:-40° C to+105° C  
 Soldering temperature:+255° C

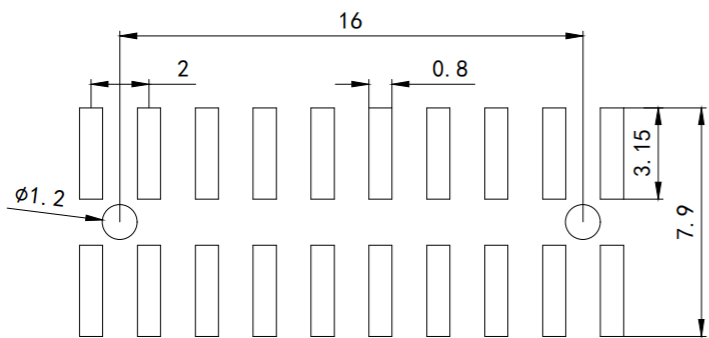

Recommended P. C. B  
Layout ( $\pm 0.05$ )

<b>TOLERANCE</b>			<b>东莞市恒祺电子科技有限公司</b>		
X. XXX	$\pm 0.05$		Dongguan Hengqi Electronic Technology Co., Ltd		
X. XX	$\pm 0.15$	<a href="https://www.hq-dz.com">https://www.hq-dz.com</a>		phone:15812872448	
X. X	$\pm 0.20$	TITLE: 排母 (圆针立贴)		PART NO: FH-2.0-S2XXX	
X.	$\pm 0.30$			DRAWING NO: 4.5*2.0*针位	
ANGLE	$\pm 5.0^\circ$	DRAWN: CHECKED: APPROVED:		DATE: 18-10-08	
<b>PROTECTON</b> 				DATE: 18-10-08	UNIT: mm
				DATE: 18-10-08	SCALE: FULL
		DATE: 18-10-08		SIZE: A4	