
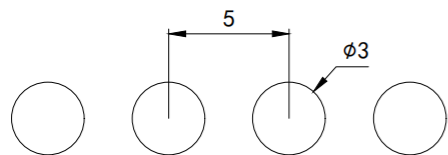
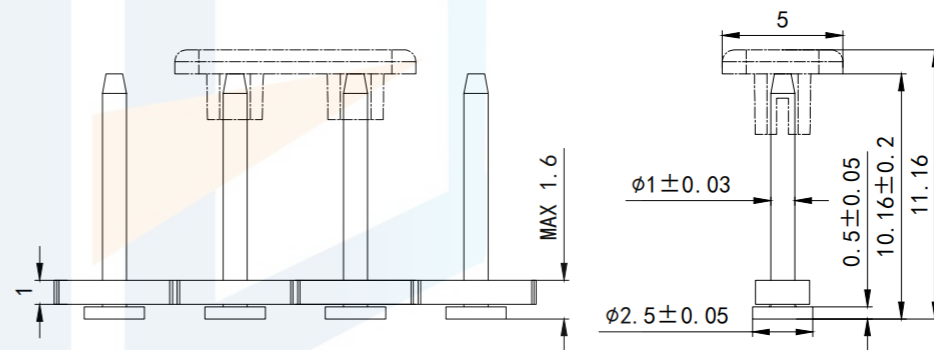


RoHS2.0
Compliant ✓





RECOMMENDED P. C. B
LAYOUT (± 0.05)

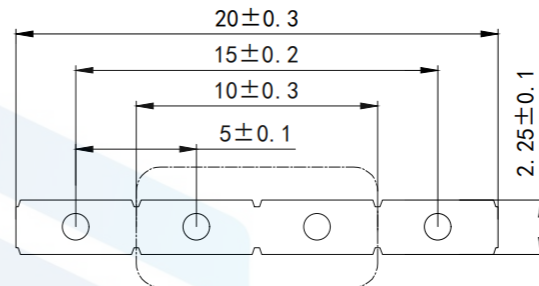

Performance parameter
item

Electrical parameters: AC250V 12A
Insulation impedance: DC500V 500MΩ
Power frequency withstand voltage: AC2500V/1 min
Mode of use
Operating parameters : $-33^{\circ}C \sim +105^{\circ}C$

TOLERANCE	X. XXX	± 0.05		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
	X. XX	± 0.15		https://www.hq-dz.com phone:15812872448	
X. X	± 0.20		TITLE: 5.0针座系列		PART NO:PH-5.0-R10XX
X.	± 0.30				DRAWING NO:5.0*4P*20
ANGLE	$\pm 5.0^{\circ}$				
PROTECTON 	DRAWN:		DATE:	18-10-08	UNIT: mm
	CHECKED:		DATE:	18-10-08	SCALE: FULL
	APPROVED:		DATE:	18-10-08	SIZE: A4