


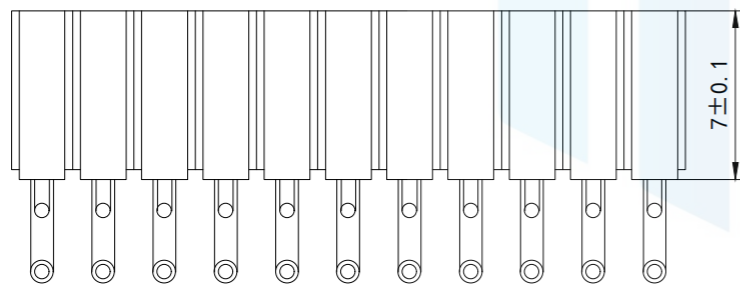


RoHS2.0  
Compliant

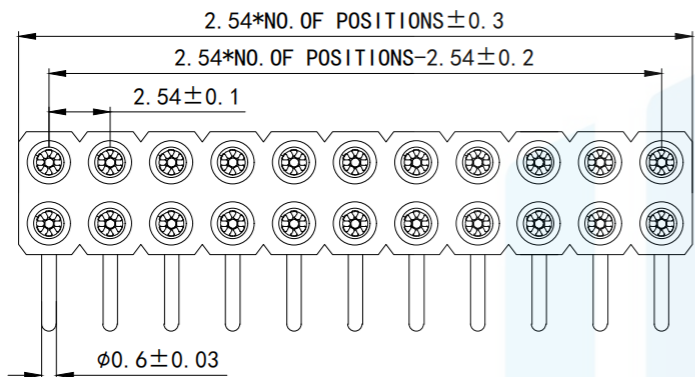

Technical Data

Pin(outer sleeve): Brass, machined CuZn38Pb2  
 Cllp(Contact 6 Finger): Beryllium copper, heat teated  
 Insulator: PPS UL94V-0 colour: black  
 Current rating: 1Amps  
 Mating pin  $\phi$ : 0.40/0.66mm  
 Forces: (polished steel gauge  $\phi$ 0.46mm)  
 -Insertion: 0.7N typ  
 -Withdrawal: 0.4N typ  
 Mechanical life: min 500cycles  
 Contact resistance: max 10m  
 Dielectric strength: min 1000V RMS  
 Operating temperature: -40° C to +105° C  
 Soldering temperature: +255° C

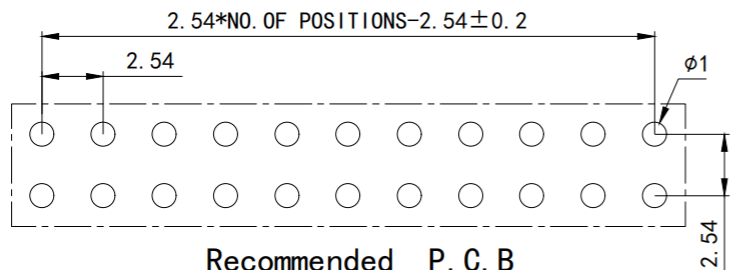

Recommended P. C. B  
Layout ( $\pm 0.05$ )

<b>TOLERANCE</b>			东莞市恒祺电子科技有限公司		
X. XXX	±0.05		Dongguan Hengqi Electronic Technology Co., Ltd		
X. XX	±0.15	https://www.hq-dz.com		phone: 15812872448	
X. X	±0.20	TITLE: 排母(弯针)		PART NO: FH-2.54-D20X	
X.	±0.30			DRAWING NO: 7*2.54*针位	
ANGLE	±5.0°	DRAWN: _____ CHECKED: _____ APPROVED: _____		DATE: 18-10-08	
<b>PROTECTON</b> 				DATE: 18-10-08	UNIT: mm
				DATE: 18-10-08	SCALE: FULL
		DATE: 18-10-08		SIZE: A4	