

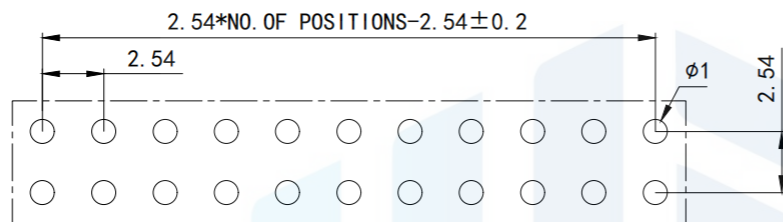
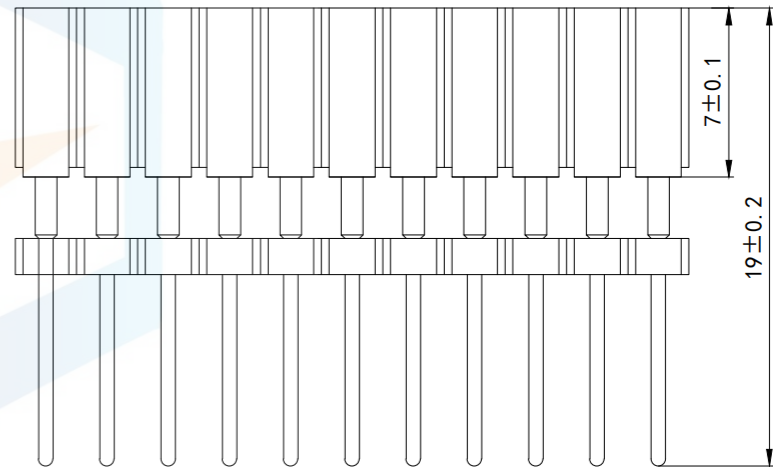


RoHS2.0
Compliant

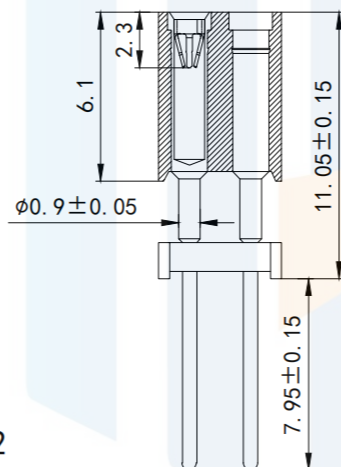

Recommended P. C. B
Layout (± 0.05)

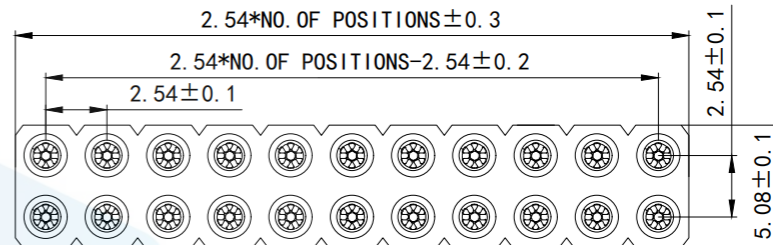

Technical Data

Pin(outer sleeve): Brass, machined CuZn38Pb2
Cllp(Contact 6 Flinger): Beryllium copper, heat teated

Insulator: PPS UL94V-0 colour: black

Current rating: 1Amps

Mating pin ϕ : 0.40/0.66mm

Forces: (polished steel gauge ϕ 0.46mm)

-Insertion: 0.7N typ

-Withdrawal: 0.4N typ

Mechanical life: min 500cycles

Contact resistance: max 10m

Dielectric strength: min 1000V RMS


Operaling temperature: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+255^{\circ}\text{C}$

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

排母

PART NO: FH-2.54-D2XX

DRAWING NO: 19*2.54*针位

DRAWN:

DATE:

18-10-08

UNIT: mm

CHECKED:

DATE:

18-10-08

SCALE: FULL

APPROVED:

DATE:

18-10-08

SIZE: A4