


RoHS2.0  
Compliant

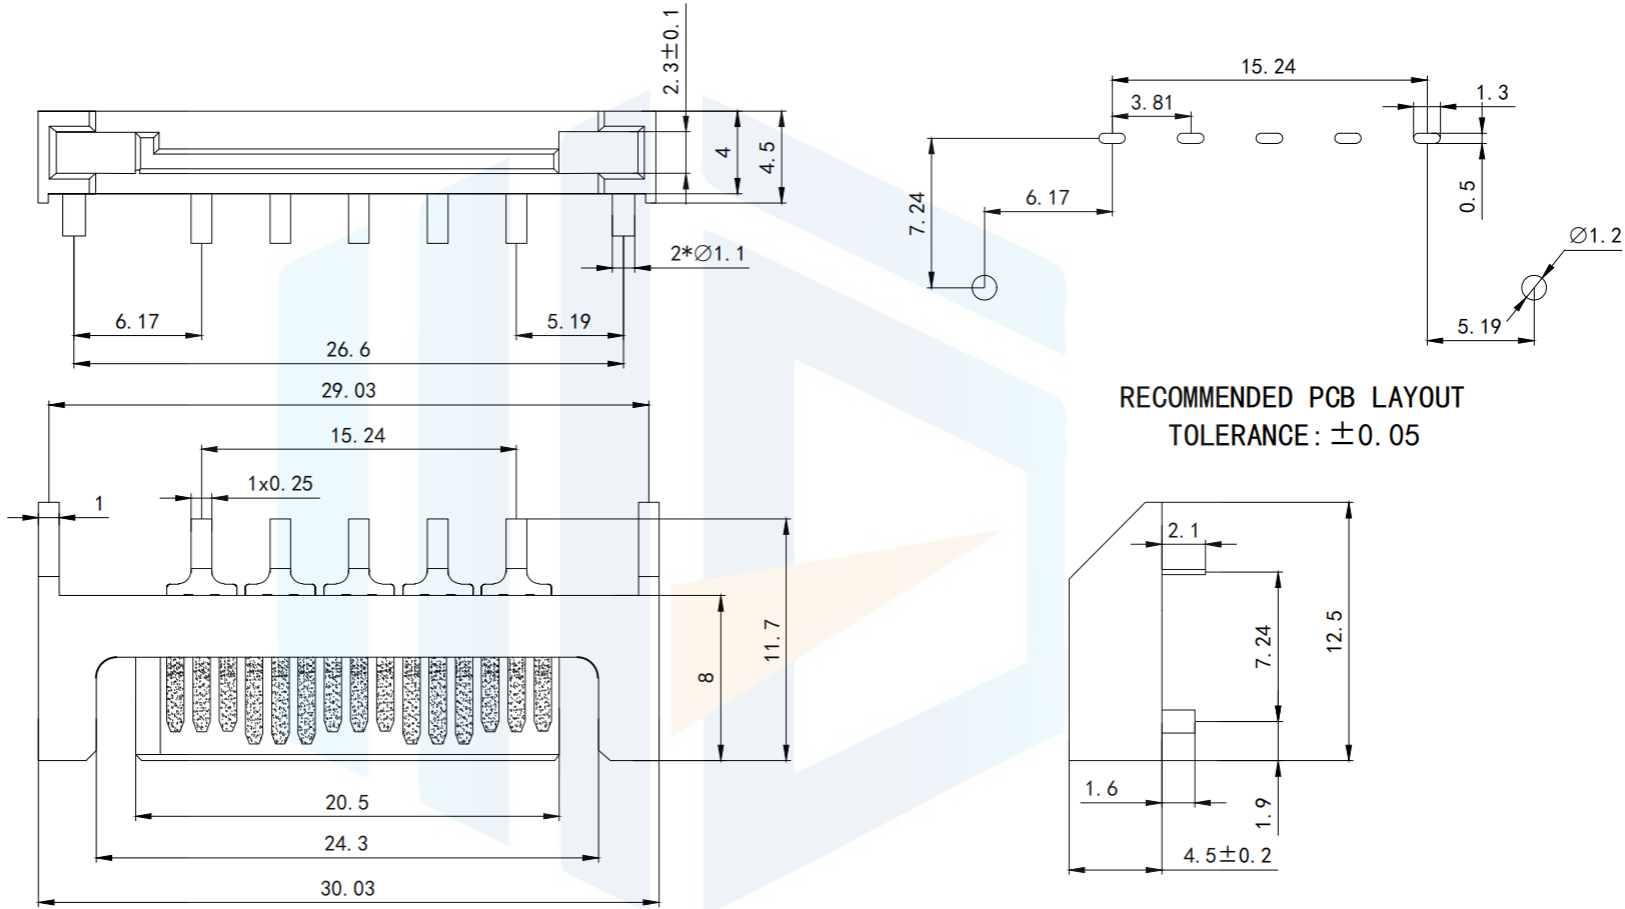

NOTES:

1.0 ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 2.5 AMPERES
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: AC 1000V MIN
- 1.3 INSULATION RESISTANCE: 1000 MEGOHMS MIN. AT 500V DC FOR 1 MINUTE

- 1.4 CONTACT RESISTANCE: 30m MAX.
- 1.5 OPERATING TEMPERATURE: -55C +100C

- 2.1 INSULATOR: LCP. UL 94V-0 RATED.
- 2.2 CONTACT: BRASS
- 2.3 CONTACT FINISH: SELECTIVE GOLD FINISHED

<b>TOLERANCE</b>			<b>东莞市恒祺电子科技有限公司</b>		
X. XXX	±0.05		Dongguan Hengqi Electronic Technology Co., Ltd		
X. XX	±0.15	<a href="https://www.hq-dz.com">https://www.hq-dz.com</a>		phone: 15812872448	
X. X	±0.20	<b>TITLE:</b>		<b>PART NO:</b> SAT-15P-105A	
X.	±0.30	SATA15P 90度带定位柱新款		<b>DRAWING NO:</b> 30*12.5*4.5	
ANGLE	±5.0°	<b>DRAWN:</b>		<b>DATE:</b> 18-10-08	
<b>PROTECTON</b>		<b>CHECKED:</b>		<b>DATE:</b> 18-10-08	
		<b>APPROVED:</b>		<b>DATE:</b> 18-10-08	
				<b>UNIT:</b> mm	
				<b>SCALE:</b> FULL	
				<b>SIZE:</b> A4	