

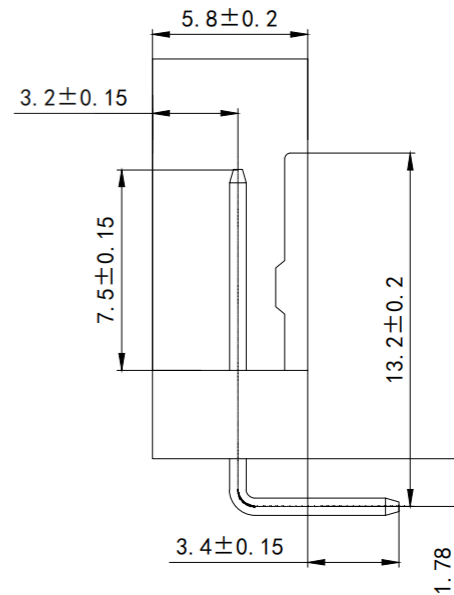
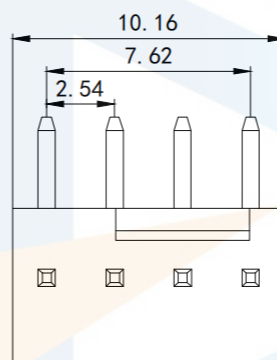


RoHS2.0
Compliant ✓





RECOMMENDED P. C. B
LAYOUT (± 0.05)

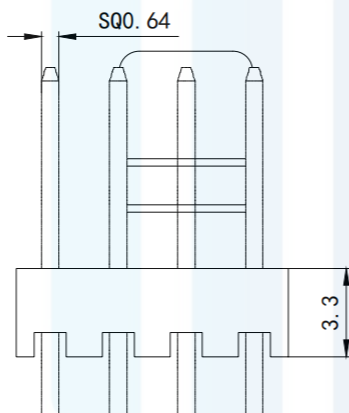

Technical Data

Pin(outersleeve):BrassTin-plated
Insulator:PA66 UL94V-0colour: black
Current rating:3Amps
Mating pin t0.64mm
Contact resistance:max 10m Ω
Dielectric strength:min 1000V RMS
Operating temperature:-40°Cto+105° 0
Solderingtemperature:+255° 0

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd			
		https://www.hq-dz.com		phone:15812872448	
PROTECTON 	TITLE: 针座		PART NO: PH-2.54-2510		
	DRAWN:		DATE: 18-10-08		
	CHECKED:		DATE: 18-10-08		
APPROVED:		DATE: 18-10-08		UNIT: mm	
				SCALE: FULL	
				SIZE: A4	