

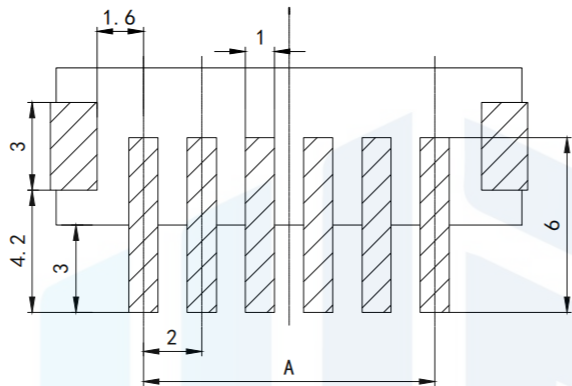
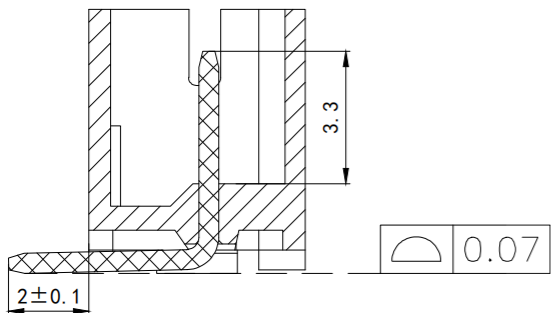


RoHS2.0
Compliant

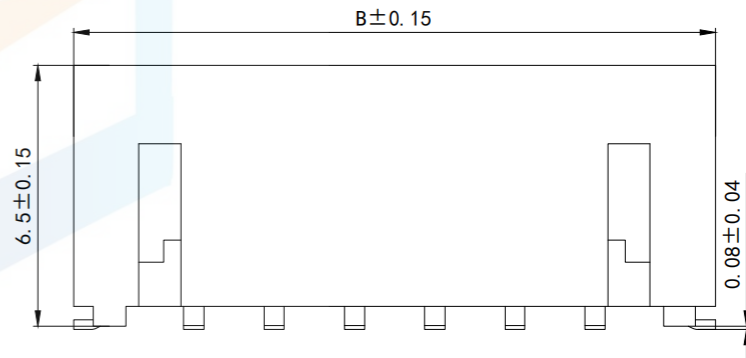

RECOMMENDED P. C. BOARD LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ± 0.05

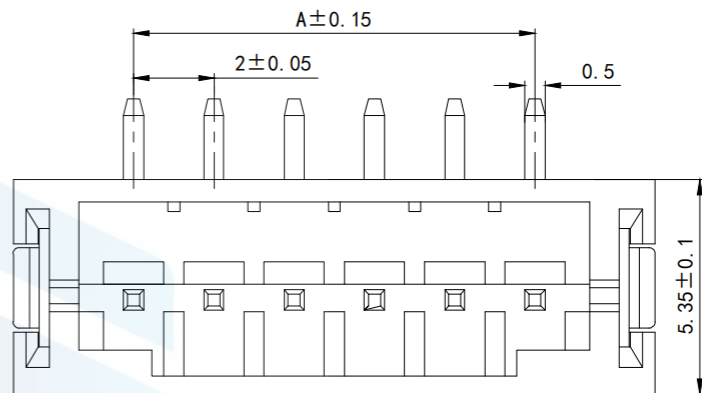

Specifications/ Technical Specifications

Current rating: 2A Current rating: 2A

Voltage rating: 125 V AC, DC

Rated voltage :126V AC, DC

Insulation Resistance: 1000M Ω Min.

Insulation resistance: minimum 1000MR

Dielectric Withstanding:

Withstand voltage :800VAC 1 min

800V AC1 Min

Contact Resistance

: Contact resistance: Max. 20m Ω Operating

Temperature:-25°C to +85°C

Operating temperature :-25°C to 85° C

20m Ω Max.

Materials/Material: Contact Material: Brass (Sn

plating) Materials/Material: Contact material:

brass (SN plating)

Soldering Terminal: Brass (Sn plating)

Solder material: Brass (tinned)

Insulation Material: LCP UL94V-0


Vitriol material, LCP UL94 V-0

孔数	型号	尺寸 (mm)	
		A	B
2	2-2ALT	2	8
3	2-3ALT	4	10
4	2-4ALT	6	12
5	2-5ALT	8	14
...
16	2-16ALT	30	36

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^\circ$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:

针座

PART NO:PH-2.0立贴-XXX

DRAWING NO:2*2.0*针位

DRAWN:

DATE:

18-10-08

UNIT:
mm

CHECKED:

DATE:

18-10-08

SCALE:
FULL

APPROVED:

DATE:

18-10-08

SIZE:
A4