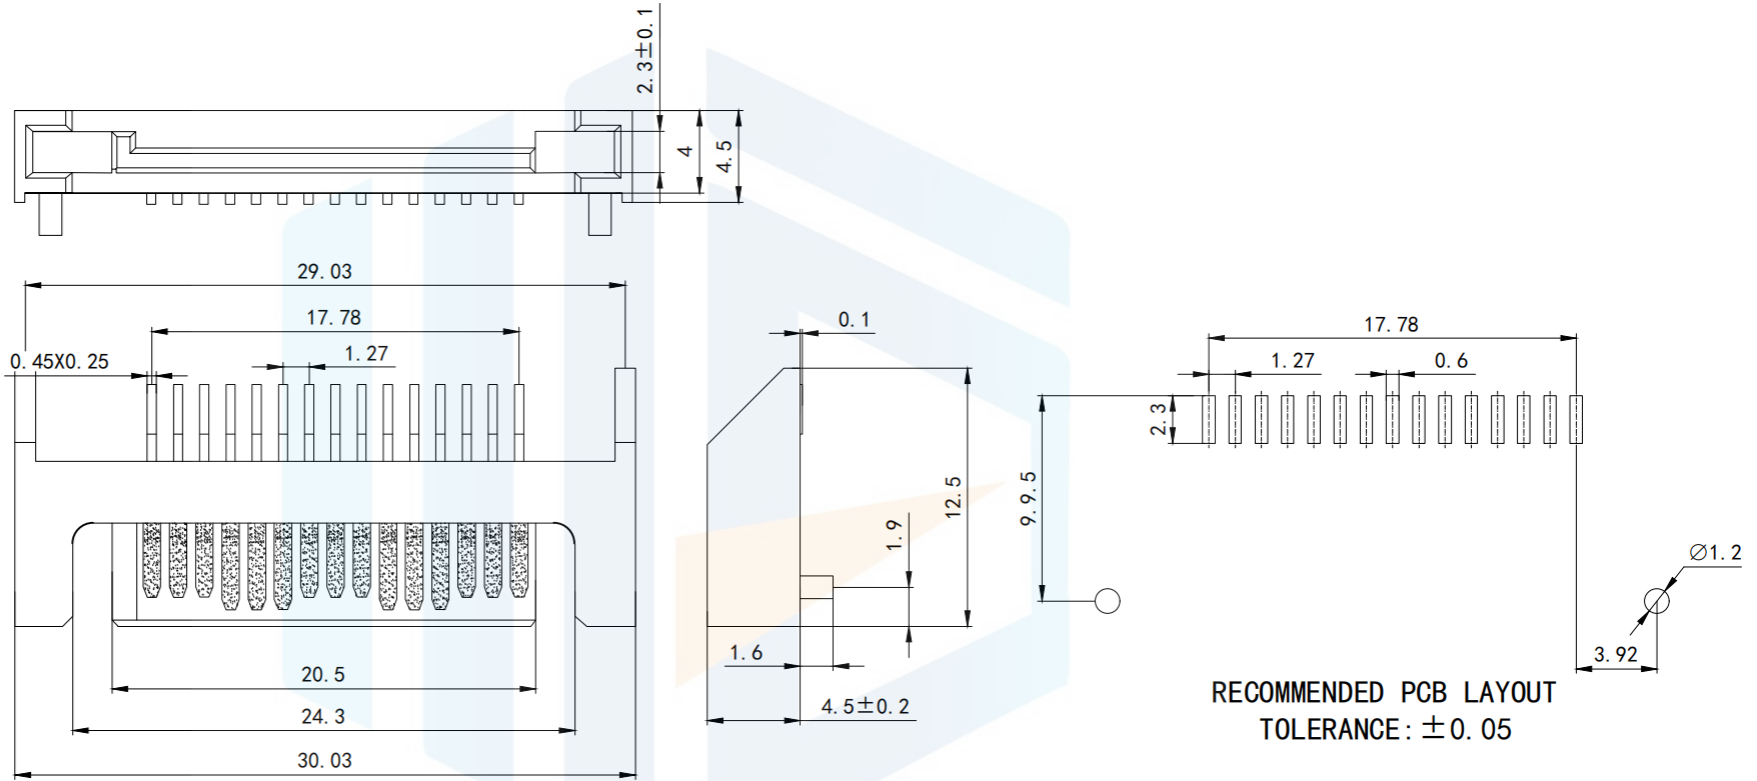




RoHS2.0  
Compliant



NOTES:

- 1.0 ELECTRICAL CHARACTERISTICS:
  - 1.1 CURRENT RATING: 2.5 AMPERES
  - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: AC 1000V MIN
  - 1.3 INSULATION RESISTANCE: 1000 MEGOHMS MIN. AT 500V DC FOR 1 MINUTE
  - 1.4 CONTACT RESISTANCE: 30m MAX.
  - 1.5 OPERATING TEMPERATURE: -55C +100C
- 2.1 INSULATOR: LCP. UL 94V-0 RATED.
- 2.2 CONTACT: BRASS
- 2.3 CONTACT FINISH: SELECTIVE GOLD FINISHED

TOLERANCE	X. XXX	±0.05		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
	X. XX	±0.15		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a> phone: 15812872448	
X. X      ±0.20 X.        ±0.30 ANGLE    ±5.0°	TITLE:		PART NO: SAT-15P-106		
	SATA15P 卧贴带定位柱老款		DRAWING NO: 30*12.5*4.5		
PROTECTON 	DRAWN:		DATE:	18-10-08	UNIT: mm
	CHECKED:		DATE:	18-10-08	SCALE: FULL
	APPROVED:		DATE:	18-10-08	SIZE: A4