

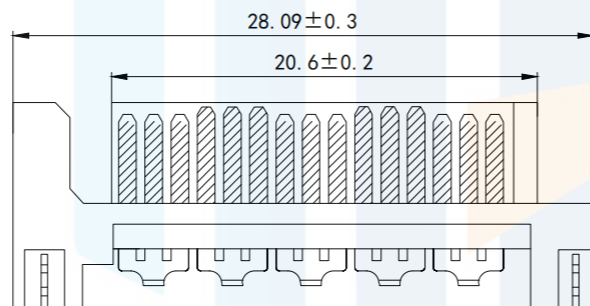
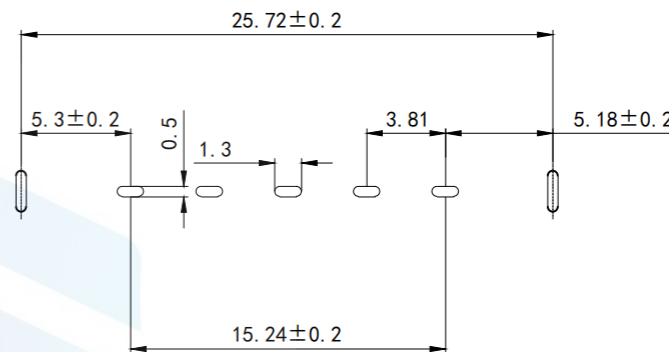


RoHS2.0
Compliant

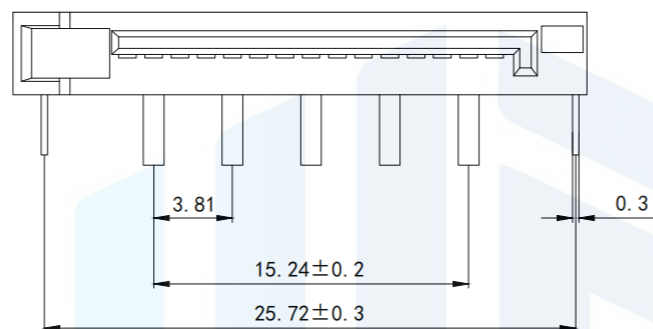

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

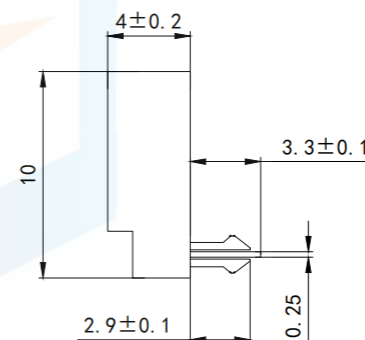

NOTES:

1. MATERIAL:

HOUSING: PA46/LCP30%G/FUL94V-0

COLOR: BLACK

CONTACT: BRASS T=0.30mm

2. FINISH:

CONTACT: GOLD FLASHPLATING ON CONTACT AREA

100 μ " MIN. TIN PLATING ON SOLDER TAILS

50 μ " MIN. NICKEL UNDERPLATING OVER ALL

BOARD LOCK: 100 μ " MIN. TIN PLATING ON SOLDER TAILS

50 μ " MIN. NICKEL UNDERPLATING OVER ALL

3. ELECTRICAL:

CURRENT RATING: 15 AMPERE PER CONTACT

CONTACT RESISTANCE: 30 m Ω MAX

INSULATION RESISTANCE: 1000 M Ω MIN


DIELECTRIC WITH STANDING VOLTAGE: 500VDC

OPERATING TEMPERATURE: -40 $^{\circ}$ C ~ +85 $^{\circ}$ C

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

SATA15P 带鱼叉5个针脚

PART NO: SAT-15P-107

DRAWING NO: 28*10*4

DRAWN:

DATE:

18-10-08

UNIT:
mm

CHECKED:

DATE:

18-10-08

SCALE:
FULL

APPROVED:

DATE:

18-10-08

SIZE:
A4