
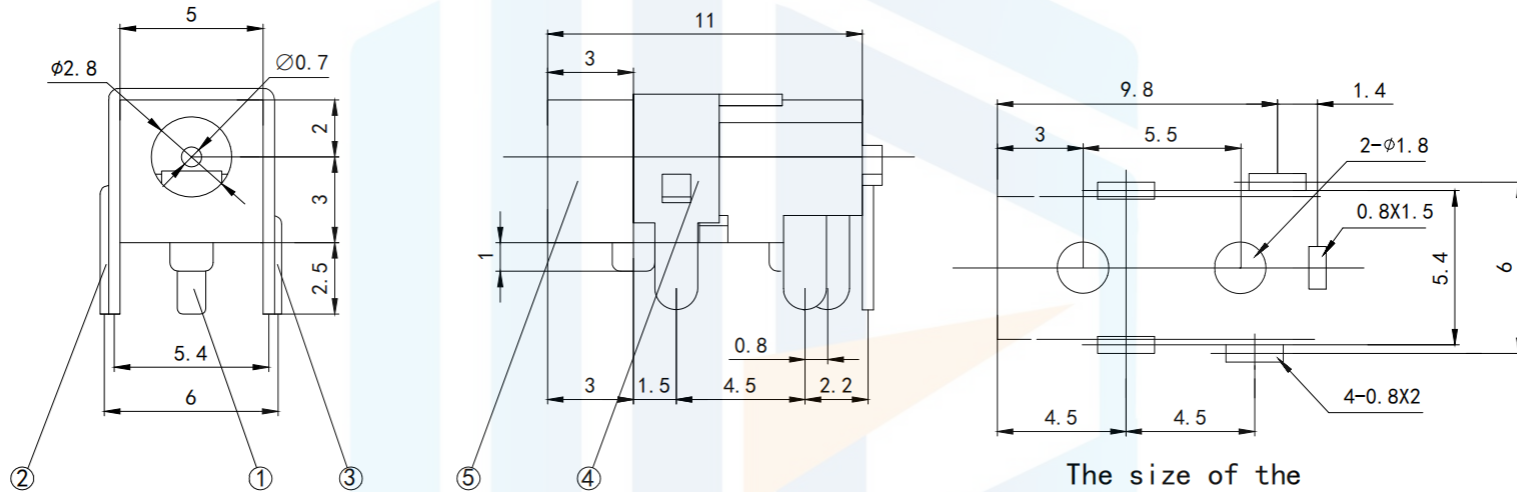


RoHS2.0  
Compliant







The size of the  
circuit board cutout



Technical requirements

1. Rated load: DC 30V 0.5A
2. Contact resistance:  $\leq 0.03 \Omega$
3. Insulation resistance:  $\geq 100 \Omega$  DC250V
4. Withstand voltage: AC 500V (50Hz)/min
5. Insertion force: 3~20N
6. Mechanical life: 5000 times

<b>TOLERANCE</b> X. XXX $\pm 0.05$ X. XX $\pm 0.15$ X. X $\pm 0.20$ X. $\pm 0.30$ ANGLE $\pm 5.0^\circ$		<b>东莞市恒祺电子科技有限公司</b> Dongguan Hengqi Electronic Technology Co., Ltd			
		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a>		phone: 15812872448	
<b>TITLE:</b> DC电源插座		<b>PART NO:</b> DC-011A			
<b>PROTECTON</b> 		<b>DRAWN:</b>		<b>DATE:</b> 18-10-08	
		<b>CHECKED:</b>		<b>DATE:</b> 18-10-08	
		<b>APPROVED:</b>		<b>DATE:</b> 18-10-08	
				<b>UNIT:</b> mm	
				<b>SCALE:</b> FULL	
				<b>SIZE:</b> A4	