
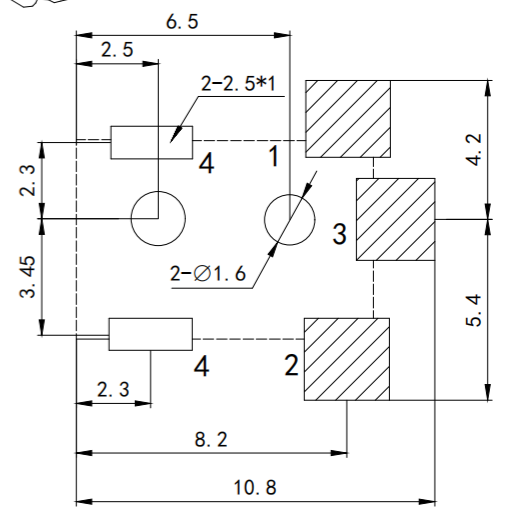
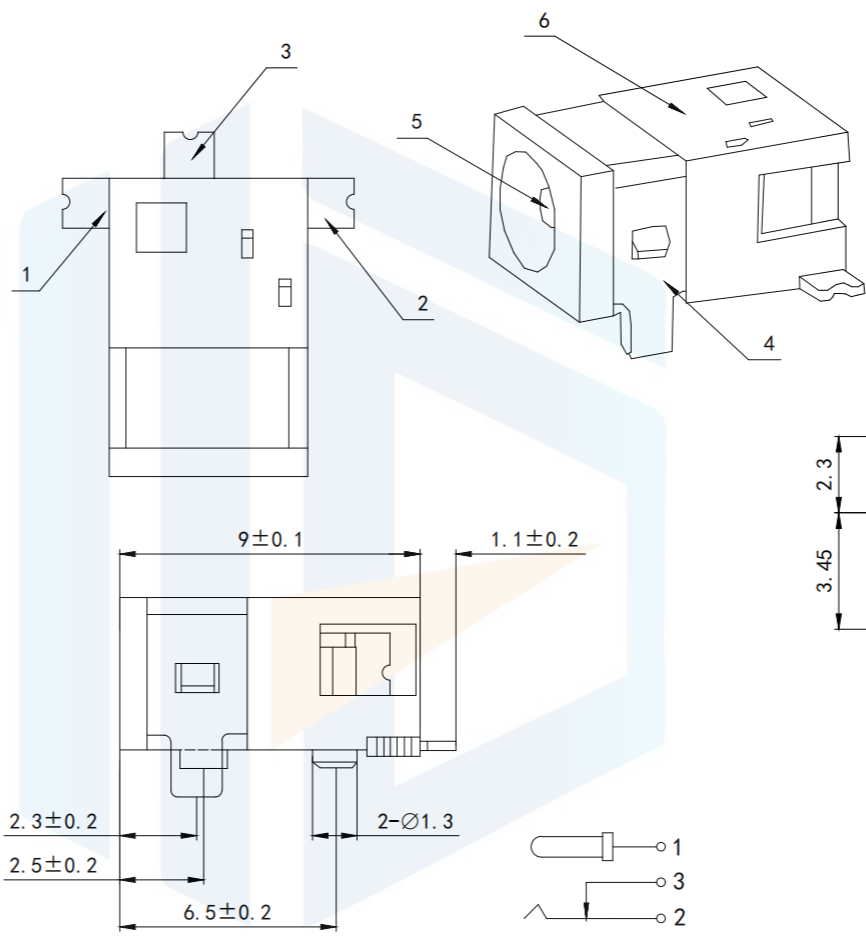
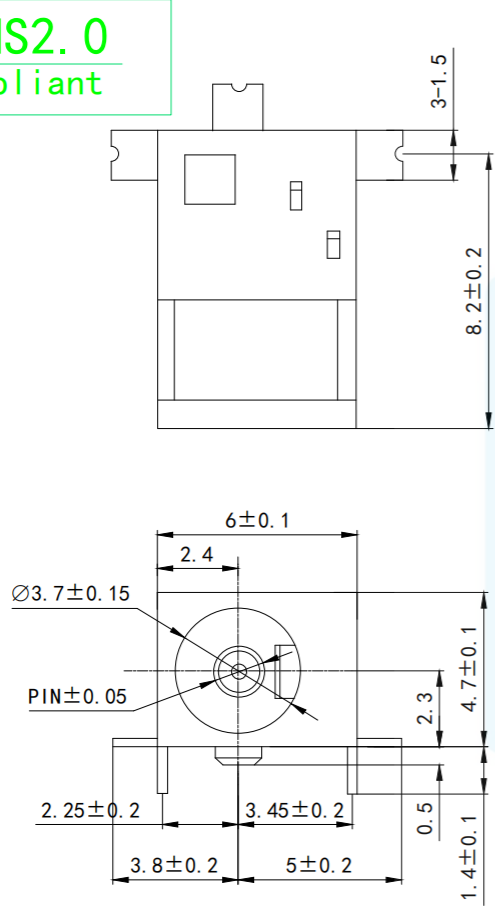


RoHS2.0  
Compliant





P. C. B LAYOUT TOP VIEW



CIRCUIT DIAGRAM

Technical requirements  
 1. Rated load: DC 30V 0.2A  
 2. Contact resistance:  $\leq 0.03 \Omega$   
 3. Insulation resistance:  $\geq 100 \Omega$  DC250V  
 4. Withstand voltage: AC 500V(50Hz)/min  
 5. Insertion force: 3~20N  
 6. Mechanical life: 5000 times  
 7. Operation temperature range:  $-40^{\circ}\text{C} \sim 55^{\circ}\text{C}$

TOLERANCE	X. XXX	$\pm 0.05$		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd		
	X. XX	$\pm 0.15$		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a> phone:15812872448		
PROTECTON	X. X	$\pm 0.20$		TITLE: DC电源插座		PART NO:DC-092A
	X.	$\pm 0.30$		DRAWING NO:9*6*4.7		DATE: 18-10-08
	ANGLE	$\pm 5.0^{\circ}$		DRAWN:	DATE: 18-10-08	UNIT: mm
				CHECKED:	DATE: 18-10-08	SCALE: FULL
				APPROVED:	DATE: 18-10-08	SIZE: A4