
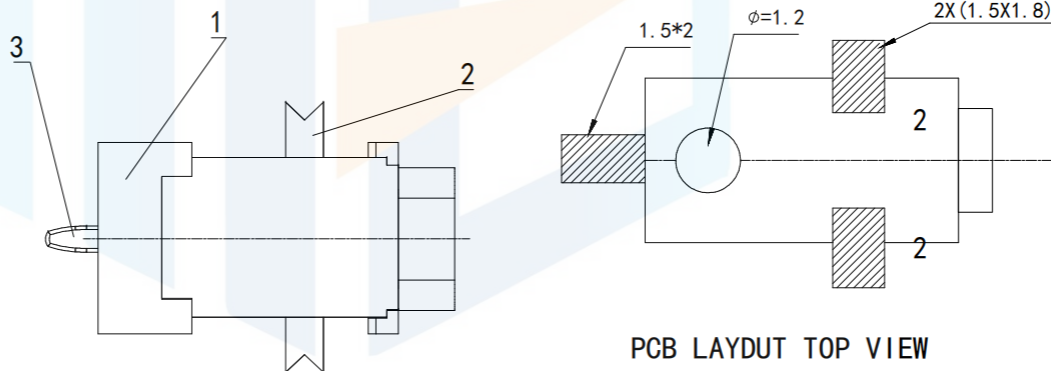
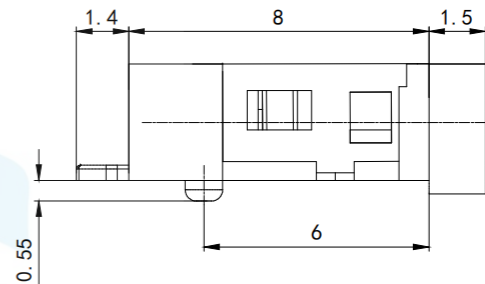

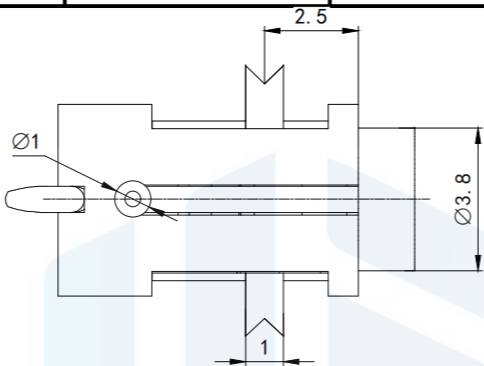



RoHS2.0
Compliant



Technical requirements


1. Rated load: DC 30V 1A
2. Contact resistance: $\leq 0.03 \Omega$
3. Insulation resistance: $\geq 100 \Omega$ DC250V
4. Withstand voltage: AC 500V(50Hz)/min
5. Insertion force: 3~20N
6. Mechanical life: 5000 times
7. Operation temperature range: $-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$

NO.	DESCRIPTION	MATERIAL	PLATED	QTY
1	HOUSING	PPA (BLACK)		1
2	冲件上盖	PHOSPHOR BRONZE T=0.2	AG	1
3	0.7针	H62 $\Phi=0.7$	AG	1

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:
DC电源插座

PART NO:DC-055N

DRAWING NO:9.5*5.1*3.1

DRAWN:

DATE: 18-10-08

UNIT:
mm

CHECKED:

DATE: 18-10-08

SCALE:
FULL

APPROVED:

DATE: 18-10-08

SIZE:
A4