

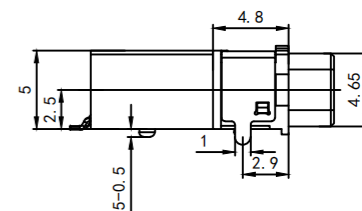






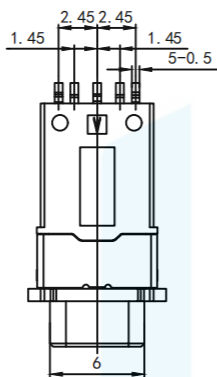
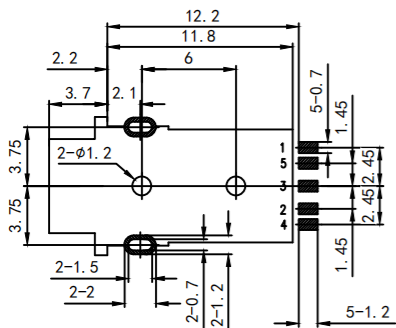






RoHS2.0
Compliant



RECOMMEND PCB LAYOUT
TOP VIEW

面板开孔参考尺寸




SPECIFICATION:

- CURRENT RATING:DC 0.5A MAX.
- VOLTAGE RATING:DC 12V.
- CONTACT RESISTANCE:50mΩ MAX.
- INSULATION RESISTANCE:100MΩ MIN. AT 500V DC.
- WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE.
- LIFE TEST:5000 CYCLES MIN.
- MATING FORCE:3~30N,
UNMATING FORCE:3~30N.
- TEPROOF LEVEL:IPX7

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:

防水耳机插座

PART NO: PJ-3825

DRAWING NO: 15.5*8.8*5.35

DRAWN:

DATE:

18-10-08

UNIT:
mm

CHECKED:

DATE:

18-10-08

SCALE:
FULL

APPROVED:

DATE:

18-10-08

SIZE:
A4