




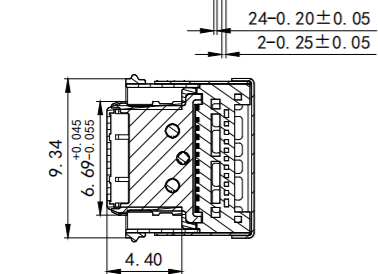

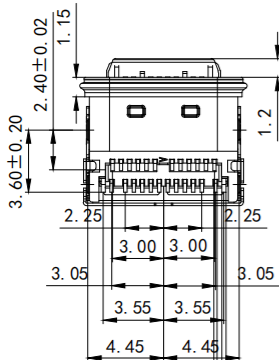
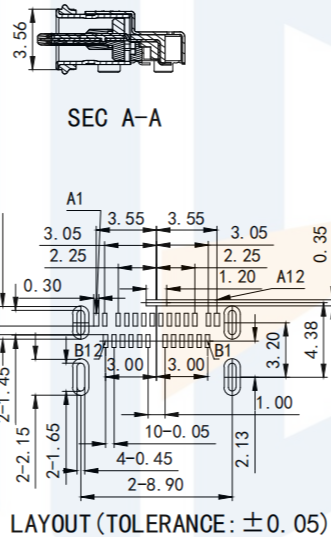


RoHS2.0  
Compliant

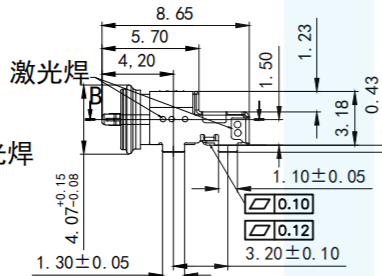

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT CURRENT RATING:
    - 5.0A FOR VBUS PIN AND ITS CORRESPONDING GND PIN.
  - CONTACT RESISTANCE:
    - 30 MILLIOHMS MAX FOR VBUS AND GND CONTACTS.
    - 40 MILLIOHMS MAX FOR ALL OTHER CONTACTS.
  - DIELECTRIC WITHSTANDING VOLTAGE: 100 VRMS AC MIN.
  - INSULATION RESISTANCE: 100 MEGOHMS MIN.
- MECHANICAL CHARACTERISTICS:
  - CONNECTOR INSERTION FORCE: 5~20N. AT A MAXIMUM RATE OF 12.5MM PER MINUTE.
  - CONNECTOR EXTRACTION-F-00CE8~20N AT A MAXIMUM RATE OF 12.5MM PER MINUTE. 6 20N AFTER DURABILITY TEST.
  - DURABILITY: 10000 CYCLES.
  - OPERATING TEMPERATURE: -55°C TO +85°C
- SALT SPRAY: 48HOURS.
- DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE INCHES EQUIVALENTS.
- RECOMMENED PROCESS: IR REFLOW 260°C, 3~5SECONDS.
- THE CONNECTOR IS ROHS COMPLIANT AND HALOGEN FREE COMPLIAN.



<p><b>TOLERANCE</b></p> <p>X. XXX ±0.05</p> <p>X. XX ±0.15</p> <p>X. X ±0.20</p> <p>X. ±0.30</p> <p>ANGLE ±5.0°</p>		<p>东莞市恒祺电子科技有限公司</p> <p>Dongguan Hengqi Electronic Technology Co., Ltd</p>	
		<p><a href="https://www.hq-dz.com">https://www.hq-dz.com</a> phone:15812872448</p>	
<p><b>PROTECTON</b></p>	<p><b>DRAWN:</b></p>	<p><b>DATE:</b> 18-10-08</p>	<p><b>UNIT:</b> mm</p>
	<p><b>CHECKED:</b></p>	<p><b>DATE:</b> 18-10-08</p>	<p><b>SCALE:</b> FULL</p>
	<p><b>APPROVED:</b></p>	<p><b>DATE:</b> 18-10-08</p>	<p><b>SIZE:</b> A4</p>
<p><b>TITLE:</b></p> <p>TYPE C 24PIN板上双层 舌头外露1.2</p>		<p><b>PART NO:</b> TYPE-C24P-FS029</p> <p><b>DRAWING NO:</b> 8.65*9.05*4.07</p>	